


SOLENOID VALVE PILOT OPERATED 2/2 WAY NORMALLY CLOSED
Elettrovalvola 2/2 vie, normalmente chiusa, servo comandata

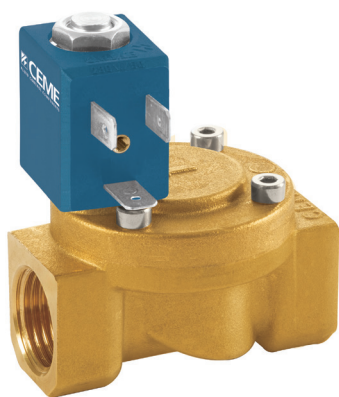

HIGHLIGHTS

- 2/2 way pilot operated N.C
- 0.25 – 10 bar
- DN 10-25 mm
- Connection 1/4 – 1
- Seals/Tenuta: NBR – EPDM – FKM
- Potable Water - Air – Water – Light Oils
- Available with stainless steel core tube (1/2 – 3/4 – 1)
- 3 pole connector IP65 included - UNI ISO 6952 (DIN 43650B)

PRODUCT DESCRIPTION

Solenoid valve 2/2 way, normally closed, pilot operated. Especially designed for use in machine and equipment with limited space. Available with kit for water hammer damped. Valve supplied with three pole connector IP65 - UNI ISO 6952 (DIN 43650B).

DESCRIZIONE PRODOTTO

Elettrovalvola servocomandata, 2/2 vie, normalmente chiusa. Valvola compatta, pensata in particolare per utilizzo in condizioni di spazio ridotto. Versione disponibile con chiusura lenta anti-colpo d'ariete. Elettrovalvola fornita con connettore tripolare IP65 - UNI ISO 6952 (DIN 43650B).



GENERAL FEATURES / CARATTERISTICHE GENERALI

Body material / Materiale corpo	Brass		
Seal material / Materiale di tenuta	EPDM	NBR	FKM
Fluid Temp. °C / Temp. fluido °C	140°	90°	150°
Tube material / Materiale tubo	Brass - Stainless steel (8554-8555-8556)		
Ambient temp. / Temp. ambiente	80°C		
Working fluids / Applicazioni Fluidi	Water, Air, Light Oils		
Electrical connect. / Connes. elettrica	6,3 x 0,8 fast-on terminal - UNI ISO 6952		
Insulation class / Classe di isolamento	H		
Min. Differential working pressure / Pressione minima di esercizio	0.25 bar		
Coil voltage / Voltaggio	220-230 VAC 50-60Hz	100-120 VAC 60Hz	12-24 VDC
Coil Power / Potenza bobina	13,5 VA	14 VA	10 W
Ambient temp. / Temp. ambiente	80°C	80°C	80°C
Approvals / Approvazioni	CE; VDE	CE; UL	CE

SPECIFICATIONS / CARATTERISTICHE

CONNECTION	ORIFICE Ø (mm)	KV m³/h	M.O.P.D. (bar)		DIMENSIONS (mm)			CODE
			AC	DC	A	B	C	
G 1/4	10	1.70	10	10	61	73	48	8512
G 3/8	12	1.86	10	10	61	73	48	8513
G 1/2	12	2.10	10	10	61	73	48	8514
NPT 3/8	12	1.86	10	10	61	73	48	8523
NPT 1/2	12	2.10	10	10	69	73	48	8524
G 1/2	12	2.10	10	10	61	79.5	48	8554 ¹
G 3/4	20	5.70	10	10	84	89	72.5	8555 ¹
G 1	25	9.60	10	10	97.5	97.5	77.5	8556 ¹

1: core tube in stainless steel / tubo centrale in acciaio inox

