


Serie **WAFER PN63.**

Articolo **720700**

**STAILESS STEEL**

Flanged ball valve PN63, full bore from DN 15 to DN 100, Antistatic Device.

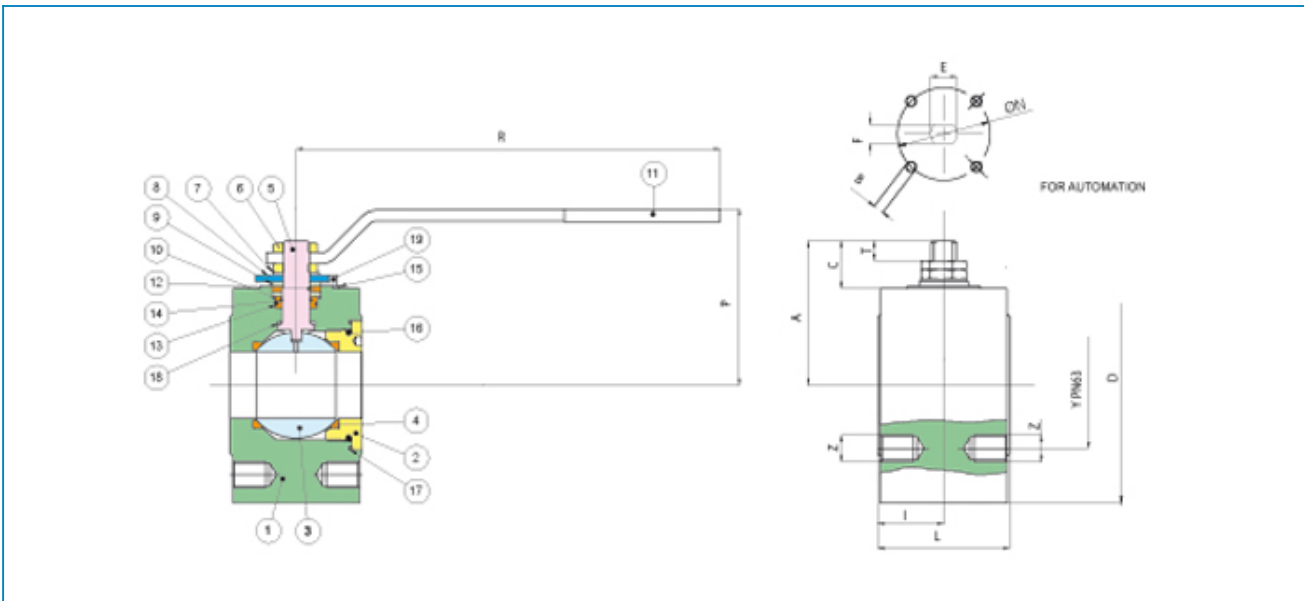

Limiti di temperatura: -20° +160° - Temperature range: -20° +160° Vuoto: 10-3 torr. - Vacuum: 10-3 torr.

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	A182-F316	1
2	END CONNECTION	A182-F316	1
3	BALL	A351-CF8M/A182-F316	1
4	BALL SEAT	P.T.F.E. + glass	2
5	STEM	A182 - F316	1
6	NUT	STAINLESS STEEL	2
7	SPRING WASHER	STAINLESS STEEL	2
8	90° STOP	STAINLESS STEEL	1
9	PACKING GLAND	A182 - F316	1
10	STEM SEAT	P.T.F.E.	1
11	HANDLE	CARBON STEEL	1
12	STEM SEAT	GRAPHOIL	1
13	O-RING	FKM (VITON®)	1
14	O-RING	FKM (VITON®)	1
15	THRUST WASHER	STAINLESS STEEL	2
16	RING	FKM (VITON®)	1
17	BODY SEAT	P.T.F.E.	1
18	THRUST WASHER	P.T.F.E.	1
19	SCREW	STAINLESS STEEL	2

MISURA SIZE	DN	D	Y	Z	I	L	R	P	A	C	T	E	F	ØN	B	kv	PN	Kg
1/2"	15	105	75	4XM12	26	55	131	71	52,5	17,5	7,5	M10	7	42- F04	M5	19,2	63	3,0
3/4"	20	130	90	4XM16	29	60	174	88	67,5	23,1	9,1	M12	8	42- F04	M5	35,0	63	5,0
1"	25	140	100	4XM16	26,5	65	174	92	72,5	24	10	M12	8	42- F04	M5	64,5	63	6,2
1"1/4	32	155	110	4XM20	38	75	251	110	87	32,5	12,5	M16	10	50- F05	M6	103,8	63	9,2
1"1/2	40	170	125	4XM20	42,5	85	251	118	93	30	10,5	M16	10	50- F05	M6	174,0	63	12,8
2"	50	180	135	4XM20	50	100	321	133	109	36	15	M20	14	70- F07	M8	301,3	63	16,8
2"1/2	65	205	160	8XM20	62,5	125	321	156	133	37,5	16,4	M20	14	70- F07	M8	545,7	63	27,8
3"	80	215	170	8XM20	75	150	381	155	132	39	17	M24	18	70- F07	M8	872,5	63	35,3
4"	100	255	200	8XM24	88	175	381	185	165	44	19,5	M24	18	102- F10	M10	1363,3	63	59




Serie **WAFER PN63.**

Articolo **720650**

**CARBON STEEL**

Flanged ball valve PN63, full bore from DN 15 to DN 100, Antistatic Device.

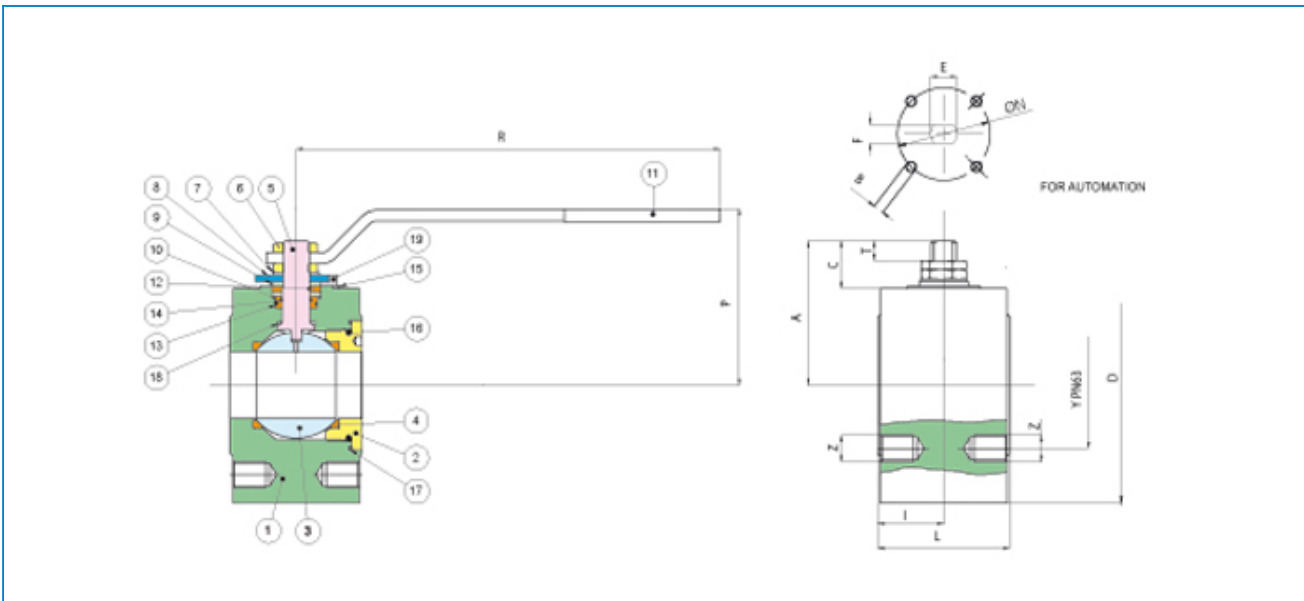

Limiti di temperatura: -20° +160° - Temperature range: -20° +160° Vuoto: 10-3 torr. - Vacuum: 10-3 torr.

3-4

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	A350 - LF2	1
2	END CONNECTION	A350 - LF2	1
3	BALL	A351-CF8/A182-F304	1
4	BALL SEAT	P.T.F.E. + glass	2
5	STEM	A182 - F316	1
6	NUT	CARBON STEEL	2
7	SPRING WASHER	CARBON STEEL	2
8	90° STOP	CARBON STEEL	1
9	PACKING GLAND	A182 - F316	1
10	STEM SEAT	P.T.F.E.	1
11	HANDLE	CARBON STEEL	1
12	STEM SEAT	GRAPHOIL	1
13	O-RING	FKM (VITON®)	1
14	O-RING	FKM (VITON®)	1
15	THRUST WASHER	STAINLESS STEEL	2
16	RING	FKM (VITON®)	1
17	BODY SEAT	P.T.F.E.	1
18	THRUST WASHER	P.T.F.E.	1
19	SCREW	STAINLESS STEEL	2

MISURA SIZE	DN	D	Y	Z	I	L	R	P	A	C	T	E	F	ØN	B	kv	PN	Kg
1/2"	15	105	75	4XM12	26	55	131	71	52,5	17,5	7,5	M10	7	42- F04	M5	19,2	63	3,0
3/4"	20	130	90	4XM16	29	60	174	88	67,5	23,1	9,1	M12	8	42- F04	M5	35,0	63	5,0
1"	25	140	100	4XM16	26,5	65	174	92	72,5	24	10	M12	8	42- F04	M5	64,5	63	6,2
1"1/4	32	155	110	4XM20	38	75	251	110	87	32,5	12,5	M16	10	50- F05	M6	103,8	63	9,2
1"1/2	40	170	125	4XM20	42,5	85	251	118	93	30	10,5	M16	10	50- F05	M6	174,0	63	12,8
2"	50	180	135	4XM20	50	100	321	133	109	36	15	M20	14	70- F07	M8	301,3	63	16,8
2"1/2	65	205	160	8XM20	62,5	125	321	156	133	37,5	16,4	M20	14	70- F07	M8	545,7	63	27,8
3"	80	215	170	8XM20	75	150	381	155	132	39	17	M24	18	70- F07	M8	872,5	63	35,3
4"	100	255	200	8XM24	88	175	381	185	165	44	19,5	M24	18	102- F10	M10	1363,3	63	59