




Serie **SPLIT-BODY ANSI150**

Articolo **760005**

Flanged ANSI 150 stainless steel AISI 316-CF8M and carbon steel WCB ball valve, full bore, ANSI B16.10 face to face dimension, Fire Safe, Antistatic Device.

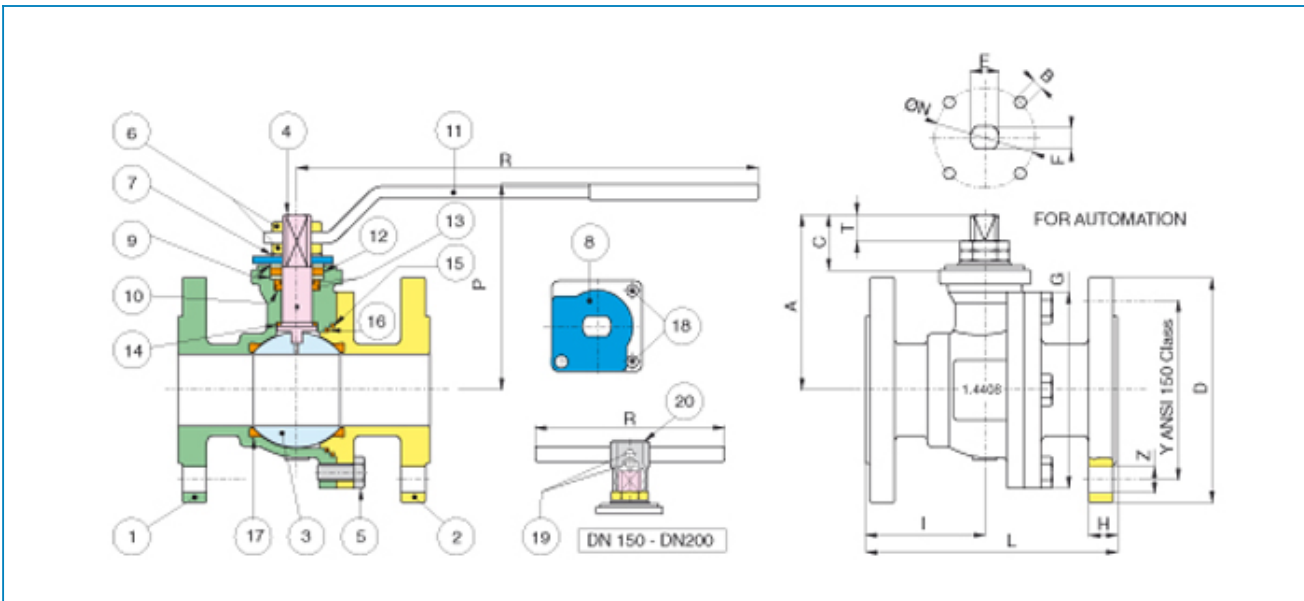


Limiti di temperatura: -20° +160° - Temperature range: -20° +160° Vuoto: 10-3 torr. - Vacuum: 10-3 torr.

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	A351-CF8M	1
2	END CONNECTION	A351-CF8M	1
3	BALL	A182-F316 / A351-CF8M	1
4	STEM	A182-F316	1
5	SCREW	DN15 - DN65 DN80 - DN 200	4-8-12
6	NUT	DN125 DN150 - DN200	1-2
7	SPRING WASHER	STAINLESS STEEL	2
8	90° STOP	A182-F316	1
9	PACKING GLAND	A182-F316	2
10	STEM SEAT	P.T.F.E.	1
11	HANDLE	A182-F316	1
12	STEM SEAL	GRAPHOIL	1
13	O-RING	FKM (VITON®)	2
14	THRUST WASHER	P.T.F.E.	1
15	BODY SEAT	GRAPHOIL	1
16	BODY SEAT	P.T.F.E.	1
17	BALL SEAT	P.T.F.E.	2
18	SCREW	STAINLESS STEEL	2
19	SCREW	STAINLESS STEEL	1
20	BODY HANDLE DN150-200	EN-GJL 250	1

MISURA SIZE	DN	D	Y	Z	H	I	L	G	P	R	A	C	T	E	F	ØN	B	Kv	PN	Kg
1/2"	15	90	60,5	4 X Ø16	11,5	46,5	108	71	88	131	52	19	8	M10	7	42- F04	M5	19,2	20	1,91
3/4"	20	100	70	4 X Ø16	13	53	117	73,5	93	131	56	19	8	M10	7	42- F04	M5	35,0	20	2,43
1"	25	110	79,5	4 X Ø16	14,5	59,5	127	90,5	89	174	72,5	27,5	13	M12	8	50- F05	M6	64,5	20	3,70
1 1/2"	40	130	98,5	4 X Ø16	17,5	77	165	114	133	250	106	30	10	M16	10	50- F05	M6	174,0	20	7,10
2"	50	150	120,5	4 X Ø19	19,5	86	178	136,5	144	321	122	38,5	18	M20	14	70- F07	M8	301,3	20	10,80
3"	80	190	152,5	4 X Ø19	24	79,5	203	178,6	173	381	151	43	18	M24	18	102- F10	M10	872,5	20	21,60
4"	100	230	190,5	8 X Ø19	24	110	229	208,6	187	381	165	43	18	M24	18	102- F10	M10	1363,3	20	30,40
5"	125	255	216	8 X Ø22	25,5	150	356	273	209	381	187	43	18	M24	18	102- F10	M10	2360,3	20	51,20
6"	150	280	241,5	8 X Ø22	25,5	181	394	311	305	700	245	68	27,5	M42	30	125- F12	M12	3671,1	20	78,00
8"	200	345	298,5	8 X Ø22	29	212	457	402	348	700	288	68	27,5	M42	30	125- F12	M12	6816,6	20	124,60
10" *	250	405	362	12 X Ø26	32,2	301,8	533	500	422	1200	353	81	47	M52	38	140- F14	M16	11170,7	10	195,00
12" *	300	485	431,8	12 X Ø26	33,8	353,8	610	560	452	1200	384	81	47	M52	38	140- F14	M16	16805,6	10	254,00

\* TRUNNION &#8710;p=10 bar

**NEW**

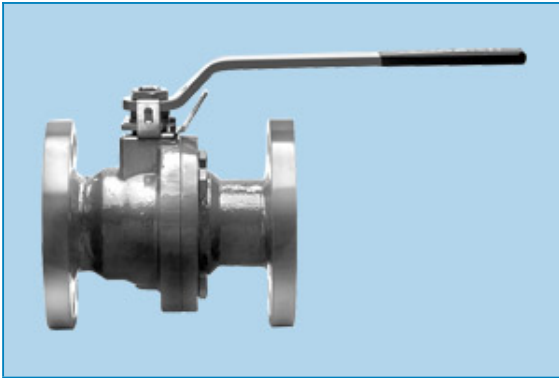


Serie **SPLIT-BODY ANSI150**

Articolo **68J000-68F000**

**STAINLESS STEEL-CARBON STEEL**

Flanged ANSI 150 API STANDARD 608 stainless steel CF8M and carbon steel LCB ball valve, full bore, ASME B16.10 face to face dimension, Fire Safe, Antistatic Device, locking device.

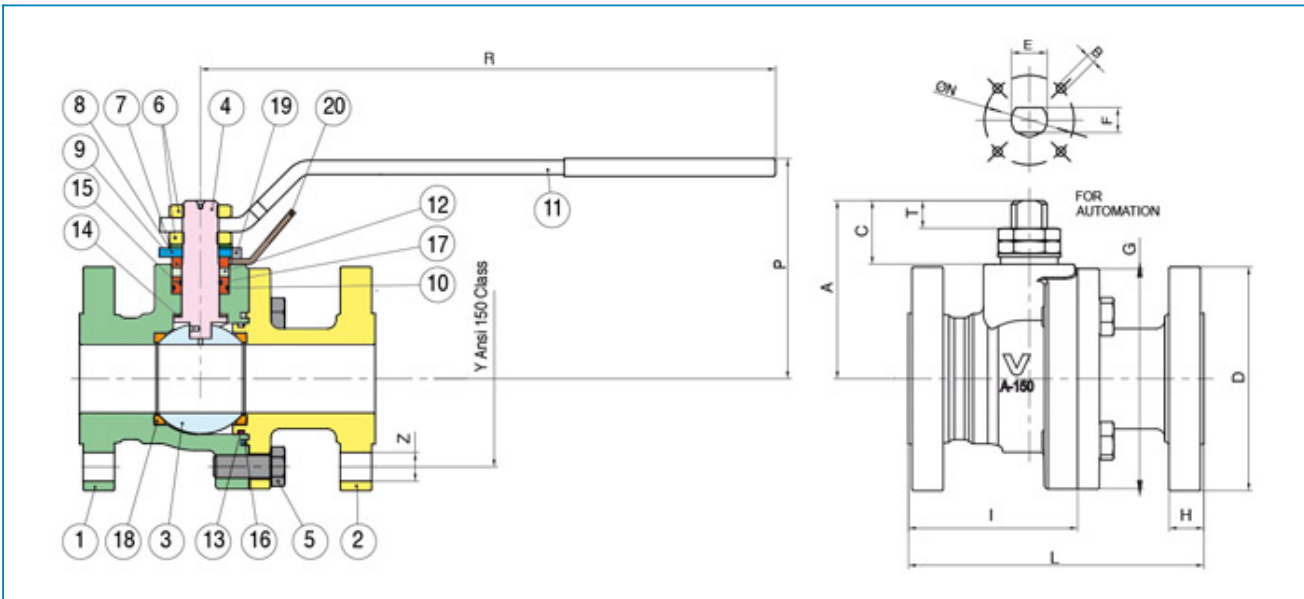

Limiti di temperatura: -20° +180° - Temperature range: -20° +180° Vuoto: 10-3 torr. - Vacuum: 10-3 torr.

POS.	PART NAME	MATERIALE - MATERIALS - MATERIAUX - WERKSTOFF- MATERIAL		N°P
		68J000	68F000	
1	BODY	A351-CF8M	A352-LCB	1
2	END CONNECTION	A351-CF8M	A352-LCB	1
3	BALL	A479-Tp316	A479-Tp316	1
4	STEM	A564 Tp630 H1150D (17-4-PH)	A564 Tp630 H1150D (17-4-PH)	1
5	SCREW	A193 B8 Cl.2	A320 L7	4
6	NUT	STAINLESS STEEL	CARBON STEEL	2
7	SPRING WASHER	A182-F304	CARBON STEEL	2
8	90° STOP	AISI 316	AISI 316	1
9	BUSH	A479-Tp316L	A479-Tp316L	1
10	O-RING	FKM (VITON®)	FKM (VITON®)	1
11	HANDLE	AISI 316	CARBON STEEL	1
12	STEM SEAL	GRAFITE	GRAFITE	1
13	O-RING	FKM (VITON®)	FKM (VITON®)	1
14	THRUST WASHER	R.P.T.F.E.	R.P.T.F.E.	1
15	O-RING BUSH	A479-Tp316L	A479-Tp316L	1
16	BODY SEAT	GRAFITE	GRAFITE	1
17	O-RING	FKM (VITON®)	FKM (VITON®)	2
18	BALL SEAT	R.P.T.F.E.	R.P.T.F.E.	2
19	SCREW	A2-70	CARBON STEEL	1
20	LOCKING DEVICE	AISI 316	AISI 316	1

MISURA SIZE	DN	D	Y	Z	H	I	L	G	P	R	A	C	T	E	F	ØN	B	Kv	PN	Kg
1/2"	15	90	60,3	4xØ16	11,6	45,5	108	82	95	174	54	22	7,5	M12	8	42-F04	M5	19,2	20	2,4
3/4"	20	100	69,9	4xØ16	13,5	48,5	117	90	99	174	58	21,5	7,5	M12	8	42-F04	M5	35	20	3,3
1"	25	110	79,4	4xØ16	14,7	53	127	105	100	250	74,7	29,5	10,5	M16	10	50-F05	M6	64,5	20	4,81
1"1/2	40	125	98,4	4xØ16	18	94,5	165	123	123	321	100	35,5	15,5	M20	14	50-F05	M6	174	20	8,7
2"	50	150	120,5	4xØ19	19,5	76	178	140	133	321	108,5	36,5	14,5	M20	14	50-F05	M6	301,3	20	11,9
3"	80	190	152,4	4xØ19	24,3	82	203	188	167	381	149,5	47,5	22	M24	18	70-F07	M8	872,5	20	24,1
4"	100	230	190,5	8xØ19	24,3	90	229	235	186	381	167	45	20,5	M24	18	102-F10	M10	1363,3	20	38,5
6"	150	280	241,3	8xØ22	26	241	394	315	305	700	245	68	34	M42	30	125-F12	M12	3671,1	20	85,8




Serie **SPLIT-BODY ANSI150**

Articolo **760009**

Flanged ANSI 150 stainless steel AISI 316-CF8M and carbon steel WCB ball valve, full bore, ANSI B16.10 face to face dimension, Fire Safe, Antistatic Device.

Limiti di temperatura: -20° +160° - Temperature range: -20° +160° Vuoto: 10-3 torr. - Vacuum: 10-3 torr.

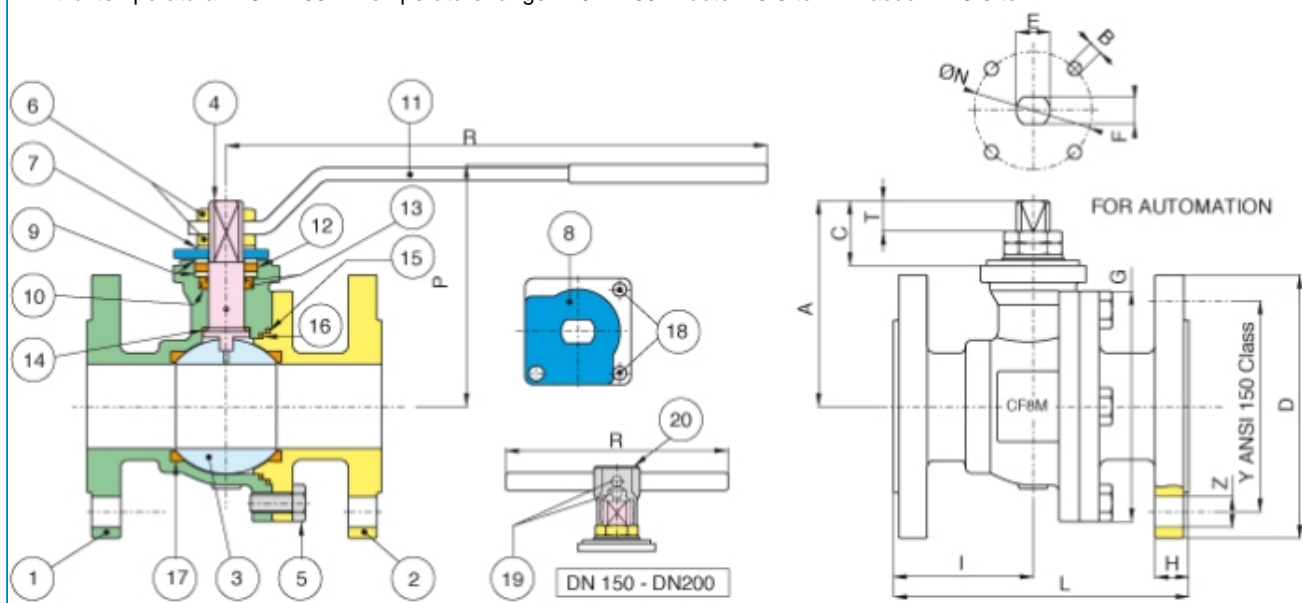

POS.	PART NAME	MATERIALE - MATERIALS - MATERIAUX WERKSTOFF- MATERIAL	N°P
1	BODY	A351-CF8M	1
2	END CONNECTION	A351-CF8M	1
3	BALL	A182-F316 / A351-CF8M	1
4	STEM	A182-F316	1
5	SCREW	DN15 - DN65 DN80 - DN 200	4 8
6	NUT	DN125 DN150 - DN200	2 1
7	SPRING WASHER	STAINLESS STEEL	2
8	90° STOP	A182-F316	1
9	PACKING GLAND	A182-F316	2
10	STEM SEAT	P.T.F.E.	1
11	HANDLE	A182-F316	1
12	STEM SEAL	GRAPHOIL	1
13	O-RING	FKM (VITON®)	2
14	THRUST WASHER	P.T.F.E.	1
15	BODY SEAT	GRAPHOIL	1
16	BODY SEAT	P.T.F.E.	1
17	BALL SEAT	P.T.F.E.+GLASS	2
18	SCREW	STAINLESS STEEL	2
19	SCREW	STAINLESS STEEL	1
20	BODY HANDLE DN150-200	EN-GJL 250	1

MISURA SIZE	DN	D	Y	Z	H	I	L	G	P	R	A	C	T	E	F	ØN	B	Kv	PN	Kg
1/2"	15	90	60,5	4 X Ø16	11,5	46,5	108	71	88	131	52	19	8	M10	7	42-F04	M5	16,3	20	1,91
3/4"	20	100	70	4 X Ø16	13	53	117	73,5	93	131	56	19	8	M10	7	42-F04	M5	29,5	20	2,43
1"	25	110	79,5	4 X Ø16	14,5	59,5	127	90,5	89	174	72,5	27,5	13	M12	8	50-F05	M6	43	20	3,70
1"1/2	40	130	98,5	4 X Ø16	17,5	77	165	114	133	250	106	30	10	M16	10	50-F05	M6	230	20	7,10
2"	50	150	120,5	4 X Ø19	19,5	86	178	136,5	144	321	122	38,5	18	M20	14	70-F07	M8	265	20	10,80
3"	80	190	152,5	4 X Ø19	24	79,5	203	178,6	173	381	151	43	18	M24	18	102-F10	M10	873	20	21,60
4"	100	230	190,5	8 X Ø19	24	110	229	208,6	187	381	165	43	18	M24	18	102-F10	M10	1390	20	30,40
5"	125	255	216	8 X Ø22	25,5	150	356	273	209	381	187	43	18	M24	18	102-F10	M10	1707	20	51,20
6"	150	280	241,5	8 X Ø22	25,5	181	394	311	305	700	245	68	35	M42	30	125-F12	M12	2024	20	78,00
8"	200	345	298,5	8 X Ø22	29	212	457	402	348	700	288	68	35	M42	30	125-F12	M12	2720	20	124,60




Serie **SPLIT-BODY ANSI150**

Articolo **760021**

Flanged ANSI 150 stainless steel AISI 316-CF8M and carbon steel WCB ball valve, full bore, ANSI B16.10 face to face dimension, Fire Safe, Antistatic Device.

Limiti di temperatura: -20° +160° - Temperature range: -20° +160° Vuoto: 10-3 torr. - Vacuum: 10-3 torr.

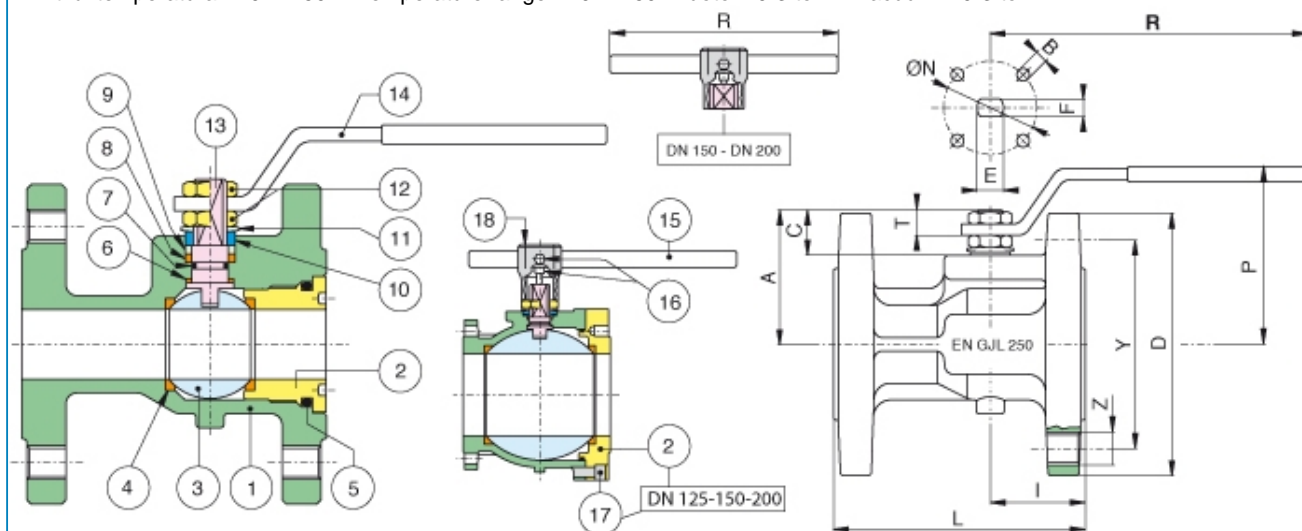

POS.	PART NAME	MATERIALE - MATERIALS - MATERIAUX WERKSTOFF- MATERIAL	N°P
1	BODY	A351-CF8M	1
2	END CONNECTION	A351-CF8M	1
3	BALL	A182-F316 / A351-CF8M	1
4	STEM	A182-F316	1
5	SCREW	DN15 - DN65 DN80 - DN 200	4 8
6	NUT	DN125 DN150 - DN200	2 1
7	SPRING WASHER	STAINLESS STEEL	2
8	90° STOP	A182-F316	1
9	PACKING GLAND	A182-F316	2
10	STEM SEAT	P.T.F.E.	1
11	HANDLE	A182-F316	1
12	STEM SEAL	GRAPHOIL	1
13	O-RING	FKM (VITON®)	2
14	THRUST WASHER	P.T.F.E.	1
15	BODY SEAT	GRAPHOIL	1
16	BODY SEAT	P.T.F.E.	1
17	BALL SEAT	P.T.F.E.+CARBOGRAFITE	2
18	SCREW	STAINLESS STEEL	2
19	SCREW	STAINLESS STEEL	1
20	BODY HANDLE DN150-200	EN-GJL 250	1

MISURA SIZE	DN	D	Y	Z	H	I	L	G	P	R	A	C	T	E	F	ØN	B	Kv	PN	Kg
1/2"	15	90	60,5	4 X Ø16	11,5	46,5	108	71	88	131	52	19	8	M10	7	42-F04	M5	16,3	20	1,91
3/4"	20	100	70	4 X Ø16	13	53	117	73,5	93	131	56	19	8	M10	7	42-F04	M5	29,5	20	2,43
1"	25	110	79,5	4 X Ø16	14,5	59,5	127	90,5	89	174	72,5	27,5	13	M12	8	50-F05	M6	43	20	3,70
1"1/2	40	130	98,5	4 X Ø16	17,5	77	165	114	133	250	106	30	10	M16	10	50-F05	M6	230	20	7,10
2"	50	150	120,5	4 X Ø19	19,5	86	178	136,5	144	321	122	38,5	18	M20	14	70-F07	M8	265	20	10,80
3"	80	190	152,5	4 X Ø19	24	79,5	203	178,6	173	381	151	43	18	M24	18	102-F10	M10	873	20	21,60
4"	100	230	190,5	8 X Ø19	24	110	229	208,6	187	381	165	43	18	M24	18	102-F10	M10	1390	20	30,40
5"	125	255	216	8 X Ø22	25,5	150	356	273	209	381	187	43	18	M24	18	102-F10	M10	1707	20	51,20
6"	150	280	241,5	8 X Ø22	25,5	181	394	311	305	700	245	68	35	M42	30	125-F12	M12	2024	20	78,00
8"	200	345	298,5	8 X Ø22	29	212	457	402	348	700	288	68	35	M42	30	125-F12	M12	2720	20	124,60






Serie **SPLIT-BODY ANSI150**

Articolo **760022**

Flanged ANSI 150 stainless steel AISI 316-CF8M and carbon steel WCB ball valve, full bore, ANSI B16.10 face to face dimension, Fire Safe, Antistatic Device.

Limiti di temperatura: -20° +160° - Temperature range: -20° +160° Vuoto: 10-3 torr. - Vacuum: 10-3 torr.

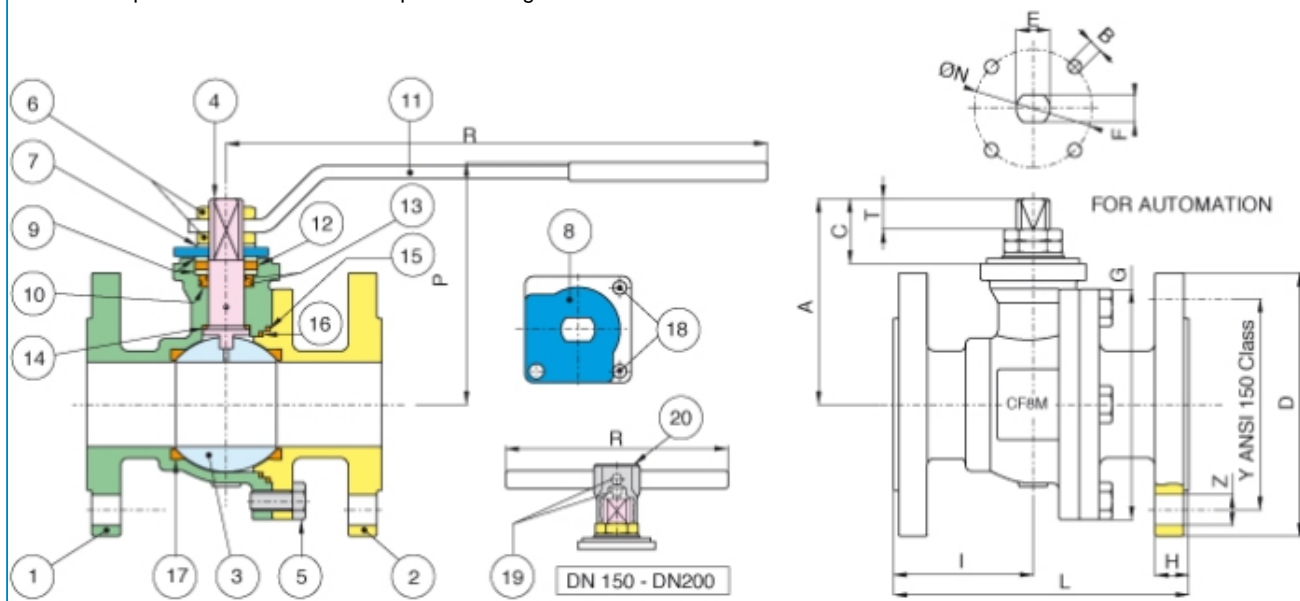

POS.	PART NAME	MATERIALE - MATERIALS - MATERIAUX WERKSTOFF- MATERIAL	N°P
1	BODY	A216-WCB	1
2	END CONNECTION	A216-WCB	1
3	BALL	A182-F304 / A351-CF8	1
4	STEM	A182-F304	1
5	SCREW	DN125 DN150 - DN200	4 8
6	NUT	DN125 DN150 - DN200	2 1
7	SPRING WASHER	CARBON STEEL	2
8	90° STOP	CARBON STEEL	1
9	PACKING GLAND	A182-F316	2
10	STEM SEAT	P.T.F.E.	1
11	HANDLE	CARBON STEEL	1
12	STEM SEAL	GRAPHOIL	1
13	O-RING	FKM (VITON®)	2
14	THRUST WASHER	P.T.F.E.	1
15	BODY SEAT	GRAPHOIL	1
16	BODY SEAT	P.T.F.E.	1
17	BALL SEAT	P.T.F.E.+CARBOGRAFITE	2
18	SCREW	CARBON STEEL	2
19	SCREW	CARBON STEEL	1
20	BODY HANDLE DN150-200	EN-GJL 250	1

MISURA SIZE	DN	D	Y	Z	H	I	L	G	P	R	A	C	T	E	F	ØN	B	Kv	PN	Kg
1/2"	15	90	60,5	4 X Ø16	11,5	46,5	108	71	88	131	52	19	8	M10	7	42-F04	M5	16,3	20	1,91
3/4"	20	100	70	4 X Ø16	13	53	117	73,5	93	131	56	19	8	M10	7	42-F04	M5	29,5	20	2,43
1"	25	110	79,5	4 X Ø16	14,5	59,5	127	90,5	89	174	72,5	27,5	13	M12	8	50-F05	M6	43	20	3,70
1"1/2	40	130	98,5	4 X Ø16	17,5	77	165	114	133	250	106	30	10	M16	10	50-F05	M6	230	20	7,10
2"	50	150	120,5	4 X Ø19	19,5	86	178	136,5	144	321	122	38,5	18	M20	14	70-F07	M8	265	20	10,80
3"	80	190	152,5	4 X Ø19	24	79,5	203	178,6	173	381	151	43	18	M24	18	102-F10	M10	873	20	21,60
4"	100	230	190,5	8 X Ø19	24	110	229	208,6	187	381	165	43	18	M24	18	102-F10	M10	1390	20	30,40
5"	125	255	216	8 X Ø22	25,5	150	356	273	209	381	187	43	18	M24	18	102-F10	M10	1707	20	51,20
6"	150	280	241,5	8 X Ø22	25,5	181	394	311	305	700	245	68	35	M42	30	125-F12	M12	2024	20	78,00
8"	200	345	298,5	8 X Ø22	29	212	457	402	348	700	288	68	35	M42	30	125-F12	M12	2720	20	124,60




Serie **SPLIT-BODY ANSI150**

Articolo **760029**

Flanged ANSI 150 stainless steel AISI 316-CF8M and carbon steel WCB ball valve, full bore, ANSI B16.10 face to face dimension, Fire Safe, Antistatic Device.

Limiti di temperatura: -20° +160° - Temperature range: -20° +160° Vuoto: 10-3 torr. - Vacuum: 10-3 torr.

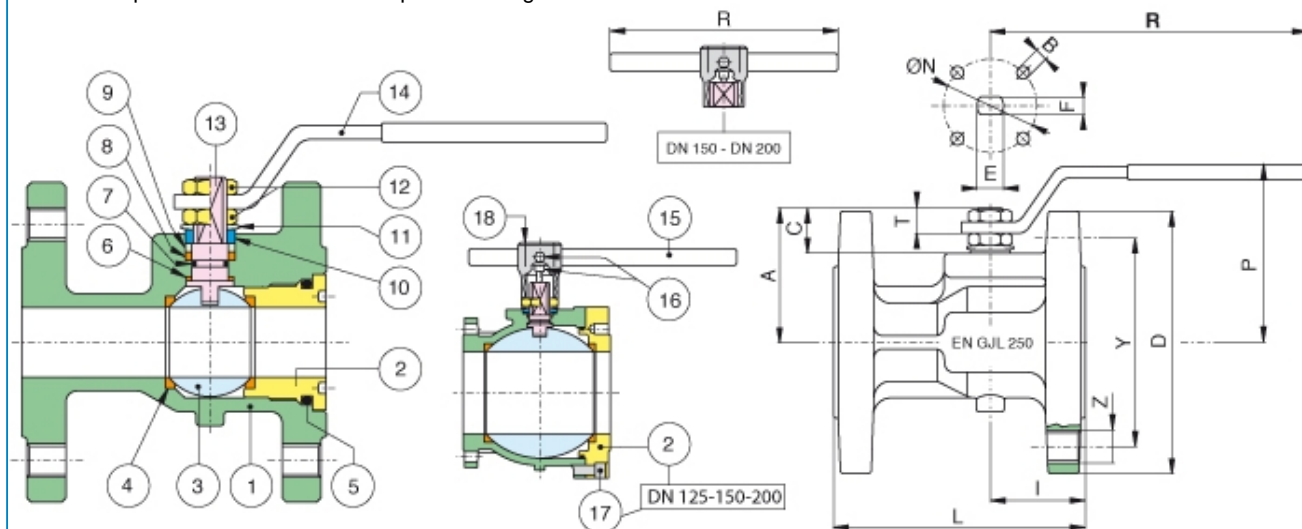

POS.	PART NAME	MATERIALE - MATERIALS - MATERIAUX WERKSTOFF- MATERIAL	N°P
1	BODY	A351-CF8M	1
2	END CONNECTION	A351-CF8M	1
3	BALL	A182-F316 / A351-CF8M	1
4	STEM	A182-F316	1
5	SCREW	DN15 - DN65 DN80 - DN 200	4 8
6	NUT	DN125 DN150 - DN200	2 1
7	SPRING WASHER	STAINLESS STEEL	2
8	90° STOP	A182-F316	1
9	PACKING GLAND	A182-F316	2
10	STEM SEAT	P.T.F.E.	1
11	HANDLE	A182-F316	1
12	STEM SEAL	GRAPHOIL	1
13	O-RING	EPDM	2
14	THRUST WASHER	P.T.F.E.	1
15	BODY SEAT	GRAPHOIL	1
16	BODY SEAT	P.T.F.E.	1
17	BALL SEAT	P.T.F.E.	2
18	SCREW	STAINLESS STEEL	2
19	SCREW	STAINLESS STEEL	1
20	BODY HANDLE DN150-200	EN-GJL 250	1

MISURA SIZE	DN	D	Y	Z	H	I	L	G	P	R	A	C	T	E	F	ØN	B	Kv	PN	Kg
1/2"	15	90	60,5	4 X Ø16	11,5	46,5	108	71	88	131	52	19	8	M10	7	42-F04	M5	16,3	20	1,91
3/4"	20	100	70	4 X Ø16	13	53	117	73,5	93	131	56	19	8	M10	7	42-F04	M5	29,5	20	2,43
1"	25	110	79,5	4 X Ø16	14,5	59,5	127	90,5	89	174	72,5	27,5	13	M12	8	50-F05	M6	43	20	3,70
1"1/2	40	130	98,5	4 X Ø16	17,5	77	165	114	133	250	106	30	10	M16	10	50-F05	M6	230	20	7,10
2"	50	150	120,5	4 X Ø19	19,5	86	178	136,5	144	321	122	38,5	18	M20	14	70-F07	M8	265	20	10,80
3"	80	190	152,5	4 X Ø19	24	79,5	203	178,6	173	381	151	43	18	M24	18	102-F10	M10	873	20	21,60
4"	100	230	190,5	8 X Ø19	24	110	229	208,6	187	381	165	43	18	M24	18	102-F10	M10	1390	20	30,40
5"	125	255	216	8 X Ø22	25,5	150	356	273	209	381	187	43	18	M24	18	102-F10	M10	1707	20	51,20
6"	150	280	241,5	8 X Ø22	25,5	181	394	311	305	700	245	68	35	M42	30	125-F12	M12	2024	20	78,00
8"	200	345	298,5	8 X Ø22	29	212	457	402	348	700	288	68	35	M42	30	125-F12	M12	2720	20	124,60




Serie **SPLIT-BODY ANSI150**

Articolo **760030**

Flanged ANSI 150 stainless steel AISI 316-CF8M and carbon steel WCB ball valve, full bore, ANSI B16.10 face to face dimension, Fire Safe, Antistatic Device.

Limiti di temperatura: -20° +160° - Temperature range: -20° +160° Vuoto: 10-3 torr. - Vacuum: 10-3 torr.

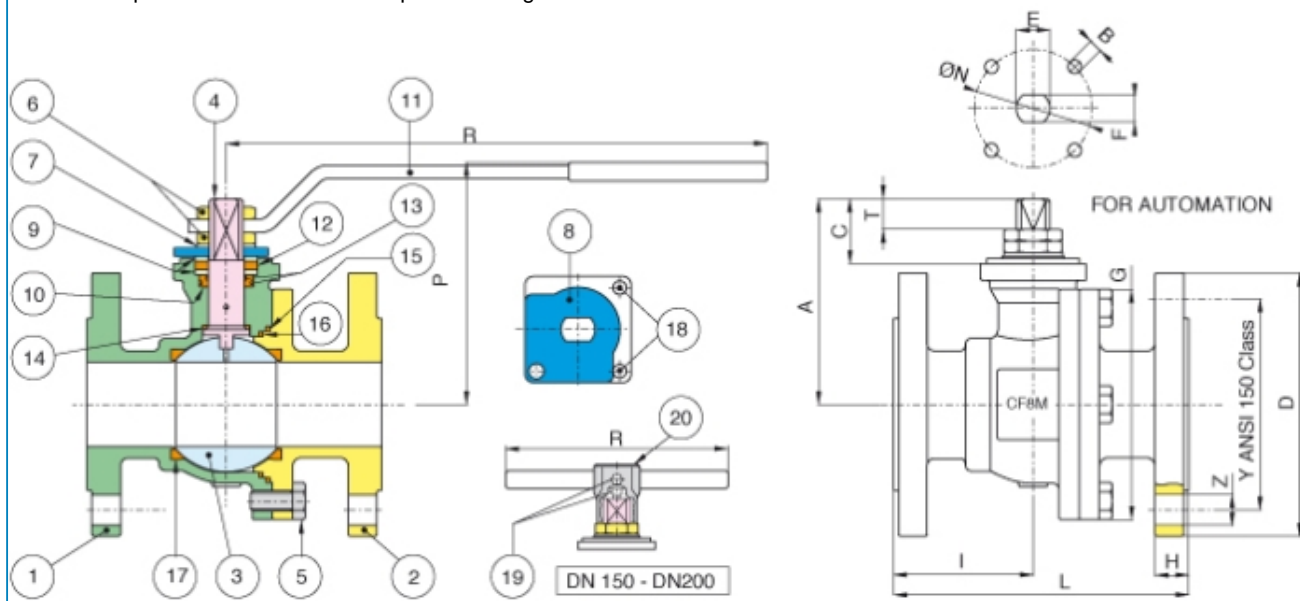

POS.	PART NAME	MATERIALE - MATERIALS - MATERIAUX WERKSTOFF- MATERIAL	N°P
1	BODY	A216-WCB	1
2	END CONNECTION	A216-WCB	1
3	BALL	A182-F304 / A351-CF8	1
4	STEM	A182-F304	1
5	SCREW	DN125 DN150 - DN200	4 8
6	NUT	DN125 DN150 - DN200	2 1
7	SPRING WASHER	CARBON STEEL	2
8	90° STOP	CARBON STEEL	1
9	PACKING GLAND	A182-F316	2
10	STEM SEAT	P.T.F.E.	1
11	HANDLE	CARBON STEEL	1
12	STEM SEAL	GRAPHOIL	1
13	O-RING	EPDM	2
14	THRUST WASHER	P.T.F.E.	1
15	BODY SEAT	GRAPHOIL	1
16	BODY SEAT	P.T.F.E.	1
17	BALL SEAT	P.T.F.E.	2
18	SCREW	CARBON STEEL	2
19	SCREW	CARBON STEEL	1
20	BODY HANDLE DN150-200	EN-GJL 250	1

MISURA SIZE	DN	D	Y	Z	H	I	L	G	P	R	A	C	T	E	F	ØN	B	Kv	PN	Kg
1/2"	15	90	60,5	4 X Ø16	11,5	46,5	108	71	88	131	52	19	8	M10	7	42-F04	M5	16,3	20	1,91
3/4"	20	100	70	4 X Ø16	13	53	117	73,5	93	131	56	19	8	M10	7	42-F04	M5	29,5	20	2,43
1"	25	110	79,5	4 X Ø16	14,5	59,5	127	90,5	89	174	72,5	27,5	13	M12	8	50-F05	M6	43	20	3,70
1"1/2	40	130	98,5	4 X Ø16	17,5	77	165	114	133	250	106	30	10	M16	10	50-F05	M6	230	20	7,10
2"	50	150	120,5	4 X Ø19	19,5	86	178	136,5	144	321	122	38,5	18	M20	14	70-F07	M8	265	20	10,80
3"	80	190	152,5	4 X Ø19	24	79,5	203	178,6	173	381	151	43	18	M24	18	102-F10	M10	873	20	21,60
4"	100	230	190,5	8 X Ø19	24	110	229	208,6	187	381	165	43	18	M24	18	102-F10	M10	1390	20	30,40
5"	125	255	216	8 X Ø22	25,5	150	356	273	209	381	187	43	18	M24	18	102-F10	M10	1707	20	51,20
6"	150	280	241,5	8 X Ø22	25,5	181	394	311	305	700	245	68	35	M42	30	125-F12	M12	2024	20	78,00
8"	200	345	298,5	8 X Ø22	29	212	457	402	348	700	288	68	35	M42	30	125-F12	M12	2720	20	124,60




Serie **SPLIT-BODY ANSI150**

Articolo **760075**

Flanged ANSI 150 stainless steel AISI 316-CF8M and carbon steel WCB ball valve, full bore, ANSI B16.10 face to face dimension, Fire Safe, Antistatic Device, degreased for oxygen.

Limiti di temperatura: -20° +160° - Temperature range: -20° +160° Vuoto: 10-3 torr. - Vacuum: 10-3 torr.

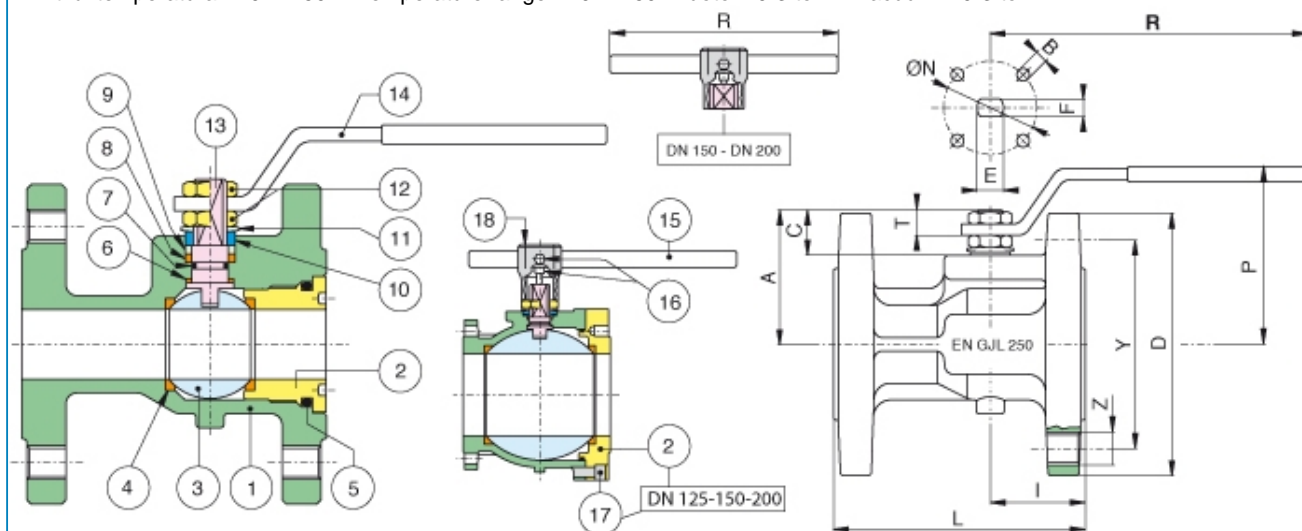

POS.	PART NAME	MATERIALE - MATERIALS - MATERIAUX WERKSTOFF- MATERIAL	N°P
1	BODY	A351-CF8M	1
2	END CONNECTION	A351-CF8M	1
3	BALL	A182-F316 / A351-CF8M	1
4	STEM	A182-F316	1
5	SCREW	DN15 - DN65 DN80 - DN 200	4 8
6	NUT	DN125 DN150 - DN200	2 1
7	SPRING WASHER	STAINLESS STEEL	2
8	90° STOP	A182-F316	1
9	PACKING GLAND	A182-F316	2
10	STEM SEAT	P.T.F.E.	1
11	HANDLE	A182-F316	1
12	STEM SEAL	GRAPHOIL	1
13	O-RING	FKM (VITON®)	2
14	THRUST WASHER	P.T.F.E.	1
15	BODY SEAT	GRAPHOIL	1
16	BODY SEAT	P.T.F.E.	1
17	BALL SEAT	P.T.F.E.	2
18	SCREW	STAINLESS STEEL	2
19	SCREW	STAINLESS STEEL	1
20	BODY HANDLE DN150-200	EN-GJL 250	1

MISURA SIZE	DN	D	Y	Z	H	I	L	G	P	R	A	C	T	E	F	ØN	B	Kv	PN	Kg
1/2"	15	90	60,5	4 X Ø16	11,5	46,5	108	71	88	131	52	19	8	M10	7	42-F04	M5	16,3	20	1,91
3/4"	20	100	70	4 X Ø16	13	53	117	73,5	93	131	56	19	8	M10	7	42-F04	M5	29,5	20	2,43
1"	25	110	79,5	4 X Ø16	14,5	59,5	127	90,5	89	174	72,5	27,5	13	M12	8	50-F05	M6	43	20	3,70
1"1/2	40	130	98,5	4 X Ø16	17,5	77	165	114	133	250	106	30	10	M16	10	50-F05	M6	230	20	7,10
2"	50	150	120,5	4 X Ø19	19,5	86	178	136,5	144	321	122	38,5	18	M20	14	70-F07	M8	265	20	10,80
3"	80	190	152,5	4 X Ø19	24	79,5	203	178,6	173	381	151	43	18	M24	18	102-F10	M10	873	20	21,60
4"	100	230	190,5	8 X Ø19	24	110	229	208,6	187	381	165	43	18	M24	18	102-F10	M10	1390	20	30,40
5"	125	255	216	8 X Ø22	25,5	150	356	273	209	381	187	43	18	M24	18	102-F10	M10	1707	20	51,20
6"	150	280	241,5	8 X Ø22	25,5	181	394	311	305	700	245	68	35	M42	30	125-F12	M12	2024	20	78,00
8"	200	345	298,5	8 X Ø22	29	212	457	402	348	700	288	68	35	M42	30	125-F12	M12	2720	20	124,60






Serie **SPLIT-BODY ANSI150**

Articolo **760076**

Flanged ANSI 150 stainless steel AISI 316-CF8M and carbon steel WCB ball valve, full bore, ANSI B16.10 face to face dimension, Fire Safe, Antistatic Device.

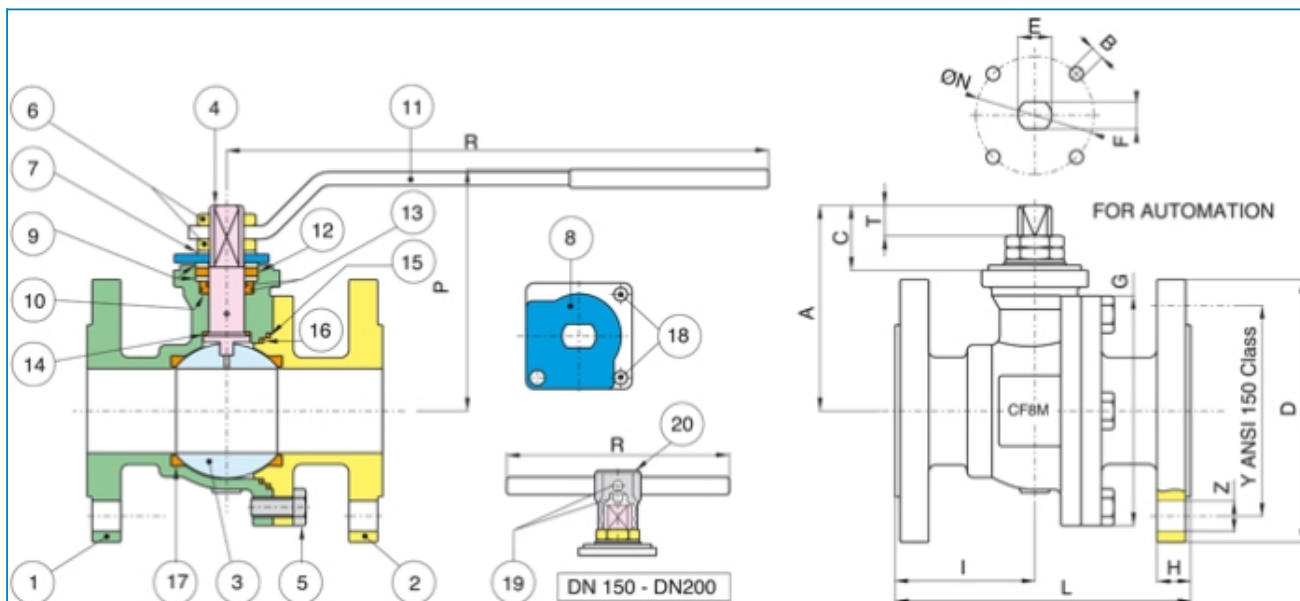

POS.	PART NAME	MATERIALE - MATERIALS - MATERIAUX WERKSTOFF- MATERIAL	N°P
1	BODY	A216-WCB	1
2	END CONNECTION	A216-WCB	1
3	BALL	A182-F304 / A351-CF8	1
4	STEM	A182-F304	1
5	SCREW	DN125 DN150 - DN200	4 8
6	NUT	DN125 DN150 - DN200	2 1
7	SPRING WASHER	CARBON STEEL	2
8	90° STOP	CARBON STEEL	1
9	PACKING GLAND	A182-F316	2
10	STEM SEAT	P.T.F.E.	1
11	HANDLE	CARBON STEEL	1
12	STEM SEAL	GRAPHOIL	1
13	O-RING	FKM (VITON®)	2
14	THRUST WASHER	P.T.F.E.	1
15	BODY SEAT	GRAPHOIL	1
16	BODY SEAT	P.T.F.E.	1
17	BALL SEAT	P.T.F.E.+GLASS	2
18	SCREW	CARBON STEEL	2
19	SCREW	CARBON STEEL	1
20	BODY HANDLE DN150-200	EN-GJL 250	1

MISURA SIZE	DN	D	Y	Z	H	I	L	G	P	R	A	C	T	E	F	ØN	B	Kv	PN	Kg
1/2"	15	90	60,5	4 X Ø16	11,5	46,5	108	71	88	131	52	19	8	M10	7	42-F04	M5	16,3	20	1,91
3/4"	20	100	70	4 X Ø16	13	53	117	73,5	93	131	56	19	8	M10	7	42-F04	M5	29,5	20	2,43
1"	25	110	79,5	4 X Ø16	14,5	59,5	127	90,5	89	174	72,5	27,5	13	M12	8	50-F05	M6	43	20	3,70
1"1/2	40	130	98,5	4 X Ø16	17,5	77	165	114	133	250	106	30	10	M16	10	50-F05	M6	230	20	7,10
2"	50	150	120,5	4 X Ø19	19,5	86	178	136,5	144	321	122	38,5	18	M20	14	70-F07	M8	265	20	10,80
3"	80	190	152,5	4 X Ø19	24	79,5	203	178,6	173	381	151	43	18	M24	18	102-F10	M10	873	20	21,60
4"	100	230	190,5	8 X Ø19	24	110	229	208,6	187	381	165	43	18	M24	18	102-F10	M10	1390	20	30,40
5"	125	255	216	8 X Ø22	25,5	150	356	273	209	381	187	43	18	M24	18	102-F10	M10	1707	20	51,20
6"	150	280	241,5	8 X Ø22	25,5	181	394	311	305	700	245	68	35	M42	30	125-F12	M12	2024	20	78,00
8"	200	345	298,5	8 X Ø22	29	212	457	402	348	700	288	68	35	M42	30	125-F12	M12	2720	20	124,60




Serie **SPLIT-BODY ANSI150**

Articolo **760081**

Flanged ANSI 150 stainless steel AISI 316-CF8M and carbon steel WCB ball valve, full bore, ANSI B16.10 face to face dimension, Fire Safe, Antistatic Device.

Limiti di temperatura: -20° +160° - Temperature range: -20° +160° Vuoto: 10-3 torr. - Vacuum: 10-3 torr.

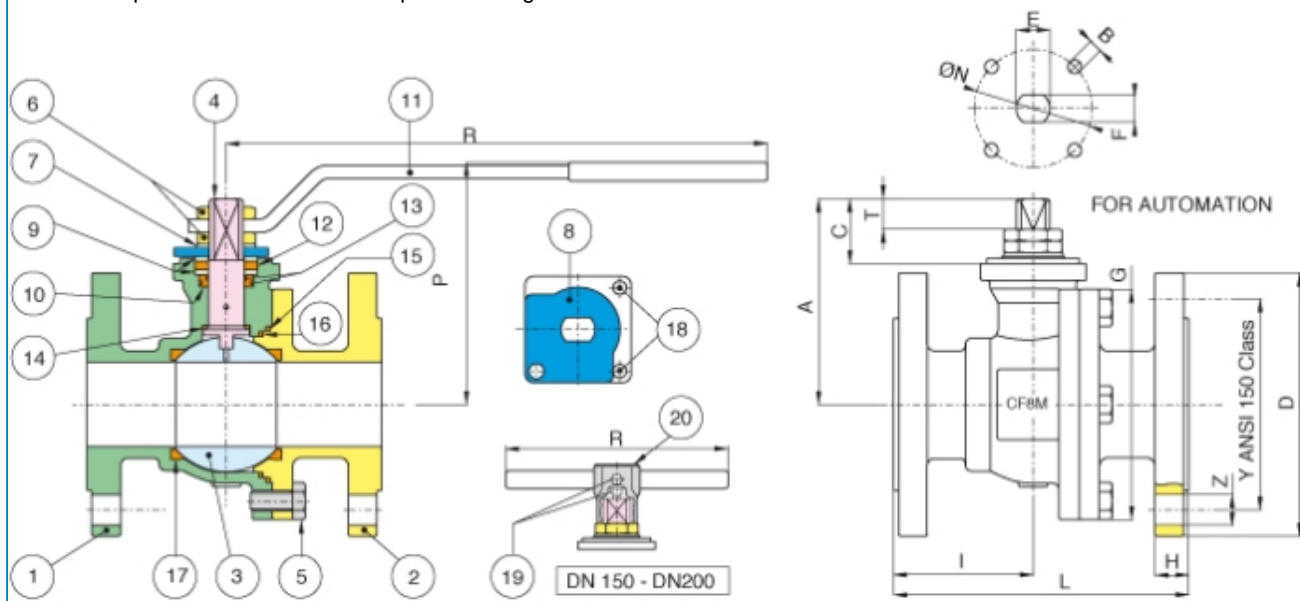

POS.	PART NAME	MATERIALE - MATERIALS - MATERIAUX WERKSTOFF- MATERIAL	N°P
1	BODY	A216-WCB	1
2	END CONNECTION	A216-WCB	1
3	BALL	A182-F304 / A351-CF8	1
4	STEM	A182-F304	1
5	SCREW	DN125 DN150 - DN200	4 8
6	NUT	DN125 DN150 - DN200	2 1
7	SPRING WASHER	CARBON STEEL	2
8	90° STOP	CARBON STEEL	1
9	PACKING GLAND	A182-F316	2
10	STEM SEAT	P.T.F.E.	1
11	HANDLE	CARBON STEEL	1
12	STEM SEAL	GRAPHOIL	1
13	O-RING	FKM (VITON®)	2
14	THRUST WASHER	P.T.F.E.	1
15	BODY SEAT	GRAPHOIL	1
16	BODY SEAT	P.T.F.E.	1
17	BALL SEAT	P.T.F.E. PEEK	2
18	SCREW	CARBON STEEL	2
19	SCREW	CARBON STEEL	1
20	BODY HANDLE DN150-200	EN-GJL 250	1

MISURA SIZE	DN	D	Y	Z	H	I	L	G	P	R	A	C	T	E	F	ØN	B	Kv	PN	Kg
1/2"	15	90	60,5	4 X Ø16	11,5	46,5	108	71	88	131	52	19	8	M10	7	42-F04	M5	16,3	20	1,91
3/4"	20	100	70	4 X Ø16	13	53	117	73,5	93	131	56	19	8	M10	7	42-F04	M5	29,5	20	2,43
1"	25	110	79,5	4 X Ø16	14,5	59,5	127	90,5	89	174	72,5	27,5	13	M12	8	50-F05	M6	43	20	3,70
1"1/2	40	130	98,5	4 X Ø16	17,5	77	165	114	133	250	106	30	10	M16	10	50-F05	M6	230	20	7,10
2"	50	150	120,5	4 X Ø19	19,5	86	178	136,5	144	321	122	38,5	18	M20	14	70-F07	M8	265	20	10,80
3"	80	190	152,5	4 X Ø19	24	79,5	203	178,6	173	381	151	43	18	M24	18	102-F10	M10	873	20	21,60
4"	100	230	190,5	8 X Ø19	24	110	229	208,6	187	381	165	43	18	M24	18	102-F10	M10	1390	20	30,40
5"	125	255	216	8 X Ø22	25,5	150	356	273	209	381	187	43	18	M24	18	102-F10	M10	1707	20	51,20
6"	150	280	241,5	8 X Ø22	25,5	181	394	311	305	700	245	68	35	M42	30	125-F12	M12	2024	20	78,00
8"	200	345	298,5	8 X Ø22	29	212	457	402	348	700	288	68	35	M42	30	125-F12	M12	2720	20	124,60




Serie **SPLIT-BODY ANSI150**

Articolo **762000**

**CARBON STEEL**

Flanged ANSI 150 stainless steel AISI 316-CF8M and carbon steel WCB ball valve, full bore, ANSI B16.10 face to face dimension, Fire Safe, Antistatic Device.

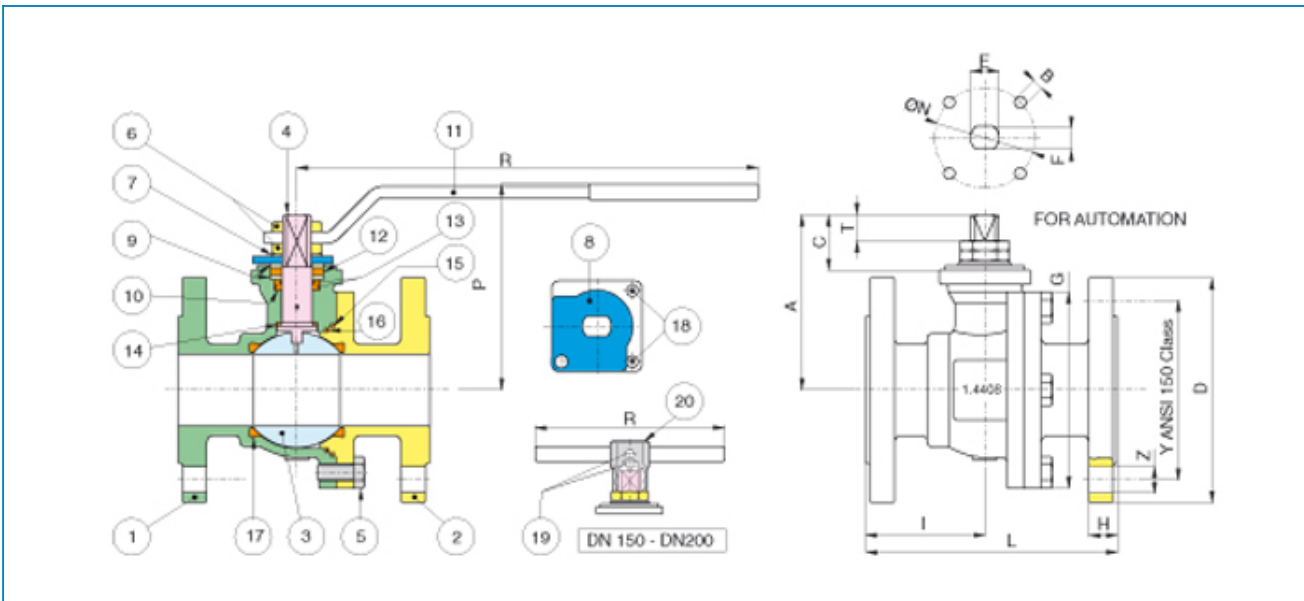

Limiti di temperatura: -10° +160° - Temperature range: -10° +160° Vuoto: 10-3 torr. - Vacuum: 10-3 torr.

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	A216-WCB	1
2	END CONNECTION	A216-WCB	1
3	BALL	A182-F304 / A351-CF8	1
4	STEM	A182-F304	1
5	SCREW	DN125 DN150 - DN200	4-8-12
6	NUT	DN125 DN150 - DN200	1-2
7	SPRING WASHER	CARBON STEEL	2
8	90° STOP	CARBON STEEL	1
9	PACKING GLAND	A182-F316	2
10	STEM SEAT	P.T.F.E.	1
11	HANDLE	CARBON STEEL	1
12	STEM SEAL	GRAPHOIL	1
13	O-RING	FKM (VITON®)	2
14	THRUST WASHER	P.T.F.E.	1
15	BODY SEAT	GRAPHOIL	1
16	BODY SEAT	P.T.F.E.	1
17	BALL SEAT	P.T.F.E.	2
18	SCREW	CARBON STEEL	2
19	SCREW	CARBON STEEL	1
20	BODY HANDLE DN150-200	EN-GJL 250	1

MISURA SIZE	DN	D	Y	Z	H	I	L	G	P	R	A	C	T	E	F	ØN	B	Kv	PN	Kg
1/2"	15	90	60,5	4 X Ø16	11,5	46,5	108	71	88	131	52	19	8	M10	7	42-F04	M5	19,2	20	1,91
3/4"	20	100	70	4 X Ø16	13	53	117	73,5	93	131	56	19	8	M10	7	42-F04	M5	35,0	20	2,43
1"	25	110	79,5	4 X Ø16	14,5	59,5	127	90,5	89	174	72,5	27,5	13	M12	8	50-F05	M6	64,5	20	3,70
1"1/2	40	130	98,5	4 X Ø16	17,5	77	165	114	133	250	106	30	10	M16	10	50-F05	M6	174,0	20	7,10
2"	50	150	120,5	4 X Ø19	19,5	86	178	136,5	144	321	122	38,5	18	M20	14	70-F07	M8	301,3	20	10,80
3"	80	190	152,5	4 X Ø19	24	79,5	203	178,6	173	381	151	43	18	M24	18	102-F10	M10	872,5	20	21,60
4"	100	230	190,5	8 X Ø19	24	110	229	208,6	187	381	165	43	18	M24	18	102-F10	M10	1363,3	20	30,40
5"	125	255	216	8 X Ø22	25,5	150	356	273	209	381	187	43	18	M24	18	102-F10	M10	2360,3	20	51,20
6"	150	280	241,5	8 X Ø22	25,5	181	394	311	305	700	245	68	27,5	M42	30	125-F12	M12	3671,1	20	78,00
8"	200	345	298,5	8 X Ø22	29	212	457	402	348	700	288	68	27,5	M42	30	125-F12	M12	6816,6	20	124,60
10" *	250	405	362	12 X Ø26	32,2	301,8	533	500	422	1200	353	81	47	M52	38	140-F14	M16	11170,7	10	195,00
12" *	300	485	431,8	12 X Ø26	33,8	353,8	610	560	452	1200	384	81	47	M52	38	140-F14	M16	16805,6	10	254,00
12 X Ø26																				

\* TRUNNION &#8710;p=10 bar




Serie **SPLIT-BODY ANSI150**

Articolo **766000**

**STAINLESS STEEL**

Flanged ANSI 150 stainless steel AISI316 - CF8M and carbon steel WCB ball valve, full bore, with ISO 5211 pad direct, ANSI B 16.10 face to face dimension, Fire safe, antistatic device

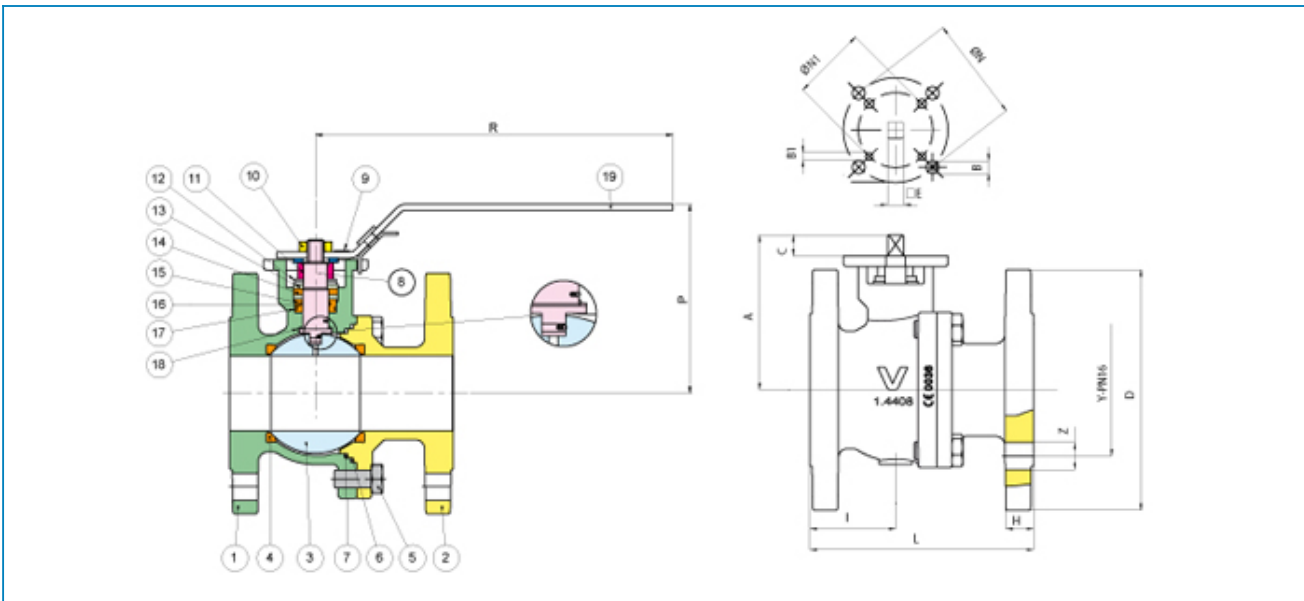


Limiti di temperatura: -20° +160° - Temperature range: -20° +160° Vuoto: 10-3 torr. - Vacuum: 10-3 torr.

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	A351-CF8M	1
2	END CONNECTION	A351-CF8M	1
3	BALL	A182-F316 / A351-CF8M	1
4	BALL SEAT	P.T.F.E.	2
5	SCREW	STAINLESS STEEL	4-8
6	BODY SEAT	GRAPHOIL	1
7	BODY SEAT	P.T.F.E.	1
8	STEM	A182-F316	1
9	SCREW	STAINLESS STEEL	1
10	NUT	STAINLESS STEEL	1
11	NUT	STAINLESS STEEL	1
12	SPRING WASHER	STAINLESS STEEL	2
13	BUSH	A182-F316	2
14	STEM SEAT	GRAPHOIL	1
15	O-RING	FKM (VITON®)	1
16	STEM SEAT	P.T.F.E.	1
17	O-RING	FKM (VITON®)	1
18	THRUST WASHER	P.T.F.E.	1
19	HANDLE	STAINLESS STEEL	1

MISURA SIZE	DN	D	Y	Z	H	I	L	P	R	A	C	E	ØN	B	ØN1	B1	PN	Kg
1/2"	15	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
3/4"	20	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1"	25	110	79,5	4X16	14,5	54	127	93	160	69	11	9	50-F05	7	-	-	20	3,8
1"1/2	40	130	98,5	4X16	17,5	76	165	118	240	94	14	11	70-F07	8,5	50-F05	M6	20	7,00
2"	50	150	102,5	4X19	19,5	84,5	178	127	240	103	13,5	11	70-F07	8,5	50-F05	M6	20	9,6
3"	80	190	152,5	4X19	24	93	203	162	320	137,5	17,5	14	102-F10	11	70-F07	M10	20	17,9
4"	100	230	190,5	8X19	24	99,5	229	177	380	153,5	19	17	102-F10	11	70-F07	M10	20	24,3



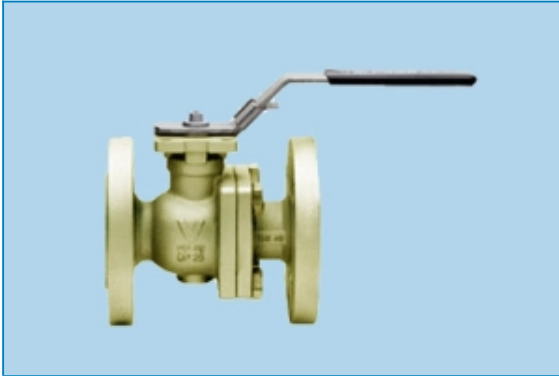


Serie **SPLIT-BODY ANSI150**

Articolo **766001**

**CARBON STEEL**

Flanged ANSI 150 stainless steel AISI316 - CF8M and carbon steel WCB ball valve, full bore, with ISO 5211 pad direct, ANSI B 16.10 face to face dimension, Fire safe, antistatic device

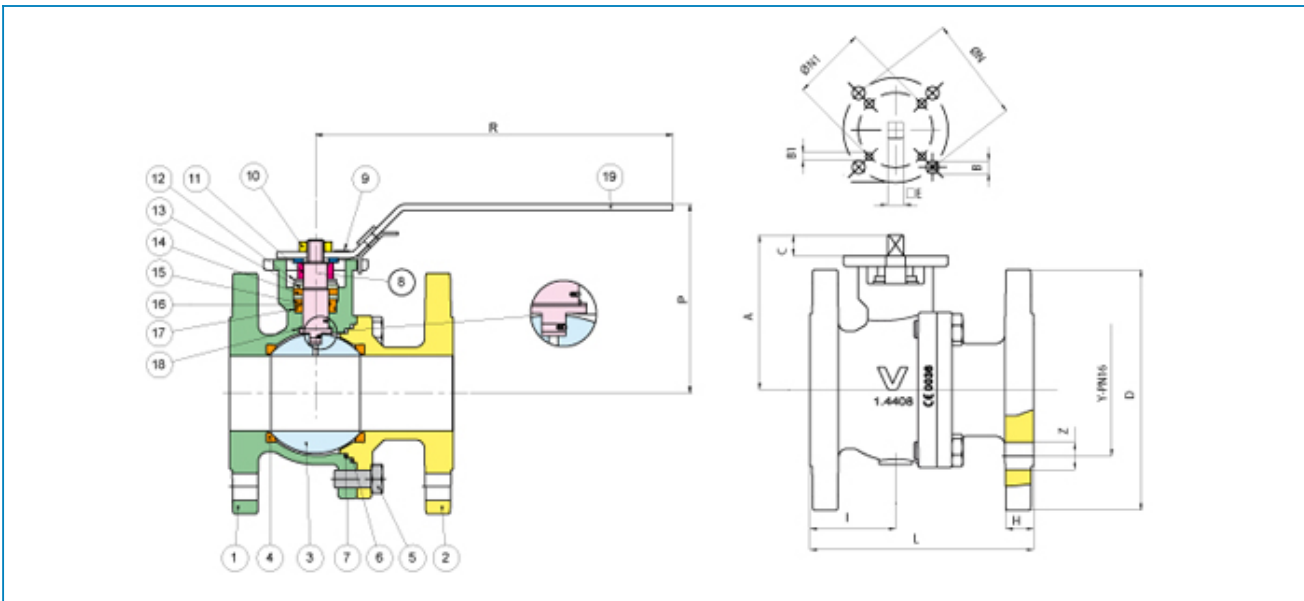

Limiti di temperatura: -20° +160° - Temperature range: -20° +160° Vuoto: 10-3 torr. - Vacuum: 10-3 torr.

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	A351-CF8M	1
2	END CONNECTION	A351-CF8M	1
3	BALL	A182-F316 / A351-CF8M	1
4	BALL SEAT	P.T.F.E.	2
5	SCREW	STAINLESS STEEL	4-8
6	BODY SEAT	GRAPHOIL	1
7	BODY SEAT	P.T.F.E.	1
8	STEM	A182-F316	1
9	SCREW	STAINLESS STEEL	1
10	NUT	STAINLESS STEEL	1
11	NUT	STAINLESS STEEL	1
12	SPRING WASHER	STAINLESS STEEL	2
13	BUSH	A182-F316	2
14	STEM SEAT	GRAPHOIL	1
15	O-RING	FKM (VITON®)	1
16	STEM SEAT	P.T.F.E.	1
17	O-RING	FKM (VITON®)	1
18	THRUST WASHER	P.T.F.E.	1
19	HANDLE	STAINLESS STEEL	1

MISURA SIZE	DN	D	Y	Z	H	I	L	P	R	A	C	E	ØN	B	ØN1	B1	PN	Kg
1/2"	15	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
3/4"	20	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
1"	25	110	79,5	4X16	14,5	54	127	93	160	69	11	9	50-F05	7	-	-	20	3,8
1"1/2	40	130	98,5	4X16	17,5	76	165	118	240	94	14	11	70-F07	8,5	50-F05	M6	20	7,00
2"	50	150	102,5	4X19	19,5	84,5	178	127	240	103	13,5	11	70-F07	8,5	50-F05	M6	20	9,6
3"	80	190	152,5	4X19	24	93	203	162	320	137,5	17,5	14	102-F10	11	70-F07	M10	20	17,9
4"	100	230	190,5	8X19	24	99,5	229	177	380	153,5	19	17	102-F10	11	70-F07	M10	20	24,3