




Serie **SPLIT-BODY ANSI600**

Articolo **760200**

**STAINLESS STEEL**


Flanged ANSI 600 stainless steel AISI 316 and carbon steel A350-LF2 ball valve, full bore, ANSI B16.10 face to face dimension, Antistatic Device.

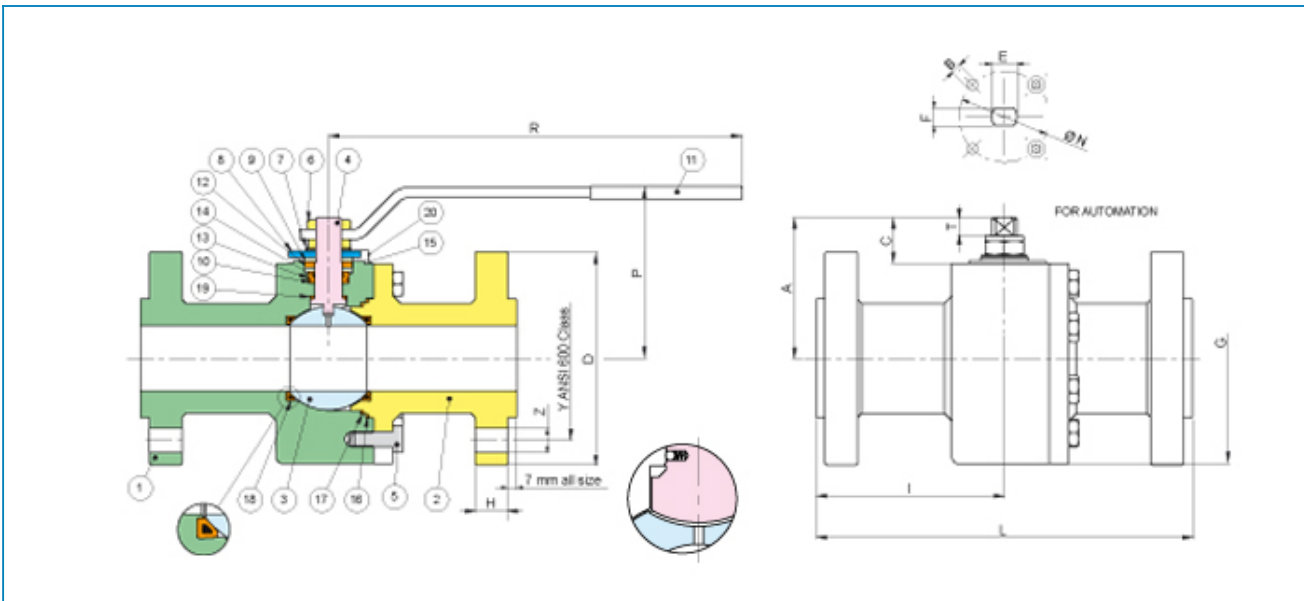

Limiti di temperatura: -20° +160° - Temperature range: -20° +160° Vuoto: 10-3 torr. - Vacuum: 10-3 torr.

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	A182-F316	1
2	END CONNECTION	A182-F316	1
3	BALL	A182-F316	1
4	STEM	A182-F316	1
5	SCREW	STAINLESS STEEL	4-8
6	NUT	STAINLESS STEEL	2
7	SPRING WASHER	STAINLESS STEEL	4
8	90° STOP	STAINLESS STEEL	1
9	PACKING GLAND	A182-F316	2
10	STEM SEAT	P.T.F.E.	1
11	HANDLE	STAINLESS STEEL	1
12	STEM SEAL	GRAPHOIL	1
13	O-RING	FKM (VITON)	1
14	O-RING	FKM (VITON)	1
15	THRUST WASHER	A182-F304	2
16	BODY SEAT	GRAPHOIL	1
17	BODY SEAT	P.T.F.E.	1
18	BALL SEAT	P.T.F.E.+ MET	2
19	THRUST WASHER	P.T.F.E.	1
20	SCREW	STAINLESS STEEL	2

MISURA SIZE	DN	D	Y	Z	H	I	L	G	R	P	A	C	T	E	F	ØN	B	Kv	PN	Kg
1/2"	15	95	66,7	4 X Ø16	14,3	82,5	165	85	131	88	52,5	19,5	8	M10	7	42-F04	M5	16,3	100	4,10
3/4"	20	115	82,6	4 X Ø19	15,9	95,5	191	95	131	92	56	19,5	8,5	M10	7	42-F04	M5	29,5	100	6,00
1"	25	125	89	4 X Ø19	17,5	108	216	108	174	110	72,5	27,5	13	M12	8	50-F05	M6	43	100	8,90
1"1/2	40	155	114,5	4 X Ø22	22,3	120,5	241	159	251	131	107	32	13	M16	10	50-F05	M6	230	100	20,00
2"	50	165	127	8 X Ø19	25,4	146	292	163	321	133	109	35,5	14	M20	14	70-F07	M8	265	100	25,50
3"	80	210	168,5	8 X Ø22	31,8	178	356	208	381	156	132	40	16	M24	18	102-F10	M10	873	100	52,00
4"	100	275	216	8 X Ø26	38,1	216	432	261	381	186	165	43	18	M24	18	102-F10	M10	1390	100	97,00

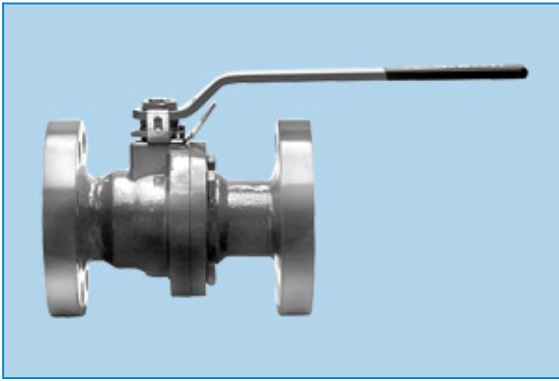


Serie **SPLIT-BODY ANSI600**

Articolo **68J401-68F400**

**STAINLESS STEEL-CARBON STEEL**

Flanged ANSI 600 API STANDARD 608 stainless steel CF8M and carbon steel LCB ball valve, full bore, ASME B16.10 face to face dimension, Fire Safe, Antistatic Device, locking device.

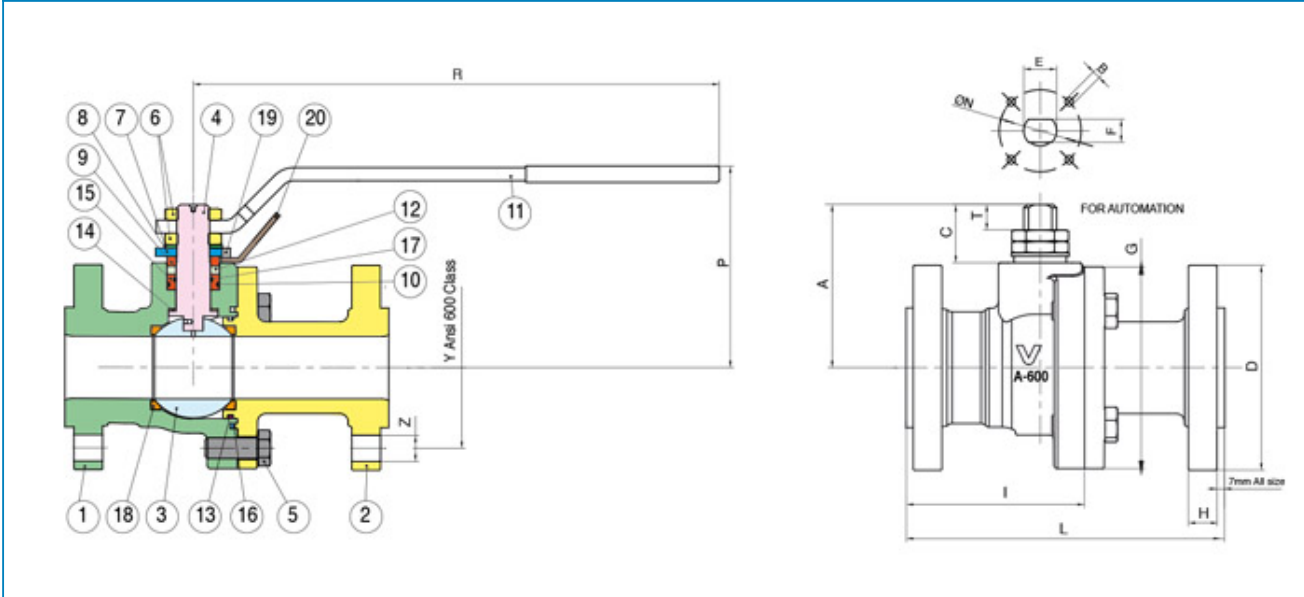

Limiti di temperatura: -20° +180° - Temperature range: -20° +180° Vuoto: 10-3 torr. - Vacuum: 10-3 torr.

POS.	PART NAME	MATERIALE - MATERIALS - MATERIAUX - WERKSTOFF- MATERIAL		N°P
		68J401	68F400	
1	BODY	A351-CF8M	A352-LCB	1
2	END CONNECTION	A351-CF8M	A352-LCB	1
3	BALL	A479-Tp316	A479-Tp316	1
4	STEM	A564 Tp630 H115OD (17-4-PH)	A564 Tp630 H115OD (17-4-PH)	1
5	SCREW	A193 B8 Cl.2	A320 L7	4
6	NUT	STAINLESS STEEL	CARBON STEEL	2
7	SPRING WASHER	A182-F304	CARBON STEEL	2
8	90° STOP	AISI 316	AISI 316	1
9	BUSH	A479-Tp316L	A479-Tp316L	1
10	O-RING	FKM (VITON®)	FKM (VITON®)	1
11	HANDLE	AISI 316	CARBON STEEL	1
12	STEM SEAL	GRAFITE	GRAFITE	1
13	O-RING	FKM (VITON®)	FKM (VITON®)	1
14	THRUST WASHER	R.P.T.F.E.	R.P.T.F.E.	1
15	O-RING BUSH	A479-Tp316L	A479-Tp316L	1
16	BODY SEAT	GRAFITE	GRAFITE	1
17	O-RING	FKM (VITON®)	FKM (VITON®)	2
18	BALL SEAT	R.P.T.F.E.	RP.T.F.E.	2
19	SCREW	A2-70	CARBON STEEL	1
20	LOCKING DEVICE	AISI 316	AISI 316	1

MISURA SIZE	DN	D	Y	Z	H	I	L	G	P	R	A	C	T	E	F	ØN	B	Kv	PN	Kg
1/2"	15	95	66,7	4xØ16	14,3	69	165	85	95	174	54	22	7,5	M12	8	42-F04	M5	19,2	100	3,6
3/4"	20	115	82,6	4xØ19	15,9	78,5	190	95	99	174	58	22	7,5	M12	8	42-F04	M5	35	100	5,1
1"	25	125	88,9	4xØ19	17,5	97,5	216	105	100	250	75	29,5	10	M16	10	50-F05	M6	64,5	100	7,2
1"1/2	40	155	114,3	4xØ22	22,3	130	241	128	123	321	99,7	35,5	15,5	M20	14	50-F05	M6	103,8	100	13,2
2"	50	165	127	8xØ19	25,4	119,5	292	144	133	321	109	36,5	14,5	M20	14	50-F05	M6	301,3	100	17,4




Serie **SPLIT-BODY ANSI300**

Articolo **761031**

**CARBON STEEL**

Flanged ANSI 300 carbon steel WCB ball valve, full bore, ANSI B16.10 face to face dimension, Fire Safe, Antistatic Device.

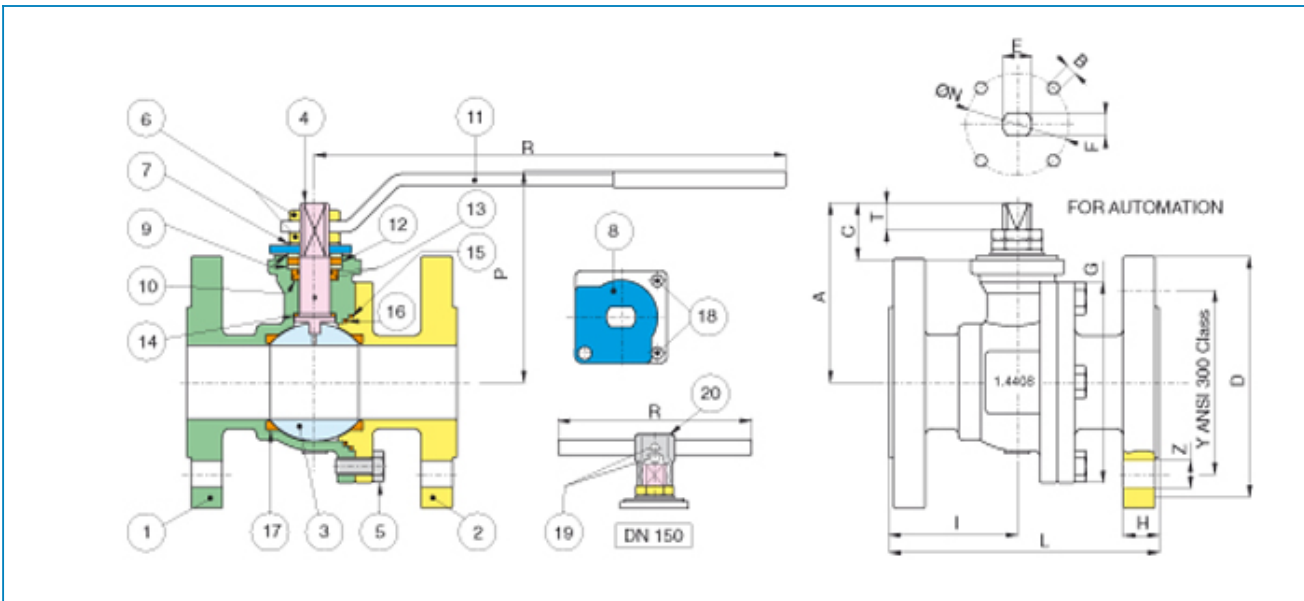

Limiti di temperatura: -10° +160° - Temperature range: -10° +160° Vuoto: 10-3 torr. - Vacuum: 10-3 torr.

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	A216-WCB	1
2	END CONNECTION	A216-WCB	1
3	BALL	A182-F304 / A351-CF8	1
4	STEM	A182-F304	1
5	SCREW	CARBON STEEL DN15 - DN40 CARBON STEEL DN50 - DN150	4-8-12
6	NUT	CARBON STEEL DN15 - DN100 CARBON STEEL DN150	1-2
7	SPRING WASHER	CARBON STEEL	2
8	90° STOP	CARBON STEEL	1
9	PACKING GLAND	A182-F316	2
10	STEM SEAT	P.T.F.E.	1
11	HANDLE	CARBON STEEL	1
12	STEM SEAL	GRAPHOIL	1
13	O-RING	FKM (VITON®)	2
14	THRUST WASHER	P.T.F.E.	1
15	BODY SEAT	GRAPHOIL	1
16	BODY SEAT	P.T.F.E.	1
17	BALL SEAT	P.T.F.E.+ Glass	2
18	SCREW	CARBON STEEL	2
19	SCREW	CARBON STEEL	2
20	BODY HANDLE DN150	EN-GJL 250	1

MISURA SIZE	DN	D	Y	Z	H	I	L	G	R	P	A	C	T	E	F	ØN	B	Kv	PN	Kg
1/2"	15	95	66,5	4 X Ø16	14,5	61,5	140	85	131	88	52	19	8	M10	7	42-F04	M5	16,3	50	2,30
3/4"	20	115	82,5	4 X Ø19	16	61	152	78	131	93	56	19	8	M10	7	42-F04	M5	29,5	50	3,50
1"	25	125	89	4 X Ø20	17,5	70,5	165	96	174	109	72,5	27,5	13	M12	8	50-F05	M6	43	50	5,20
1"1/2	40	155	114,5	4 X Ø22	21	78,5	190	126	250	133	107	30	10	M16	10	50-F05	M6	230	50	10,00
2"	50	165	127	8 X Ø20	22,5	86	216	136,5	321	144	122	38,5	18	M20	14	70-F07	M8	265	50	12,00
3"	80	210	168,5	8 X Ø22	29	81	283	178,5	381	173	151	43	18	M24	18	102-F10	M10	873	50	27,00
4"	100	255	200	8 X Ø22	32	88,5	305	219	381	187	165	43	18	M24	18	102-F10	M10	1390	50	41,00
6"	150	320	270	12 X Ø23	37	172	403	306	700	305	245	68	27,5	M42	30	125-F12	M12	2024	50	93,00
8" *	200	381	330	12 X Ø26	41,5	251	502	410	700	348	288	68,5	27,5	M42	30	125-F12	M12	2720	50	151,00

\* TRUNNION &#8710;p=25 bar