




Serie **WAFER-SPLIT ANSI600**

Articolo **763100**

STAINLESS STEEL


Wafer Split full bore flanged ball valve, ANSI 600, Antistatic Device, according to UNI EN 558 basic series 101, Fire Safe.

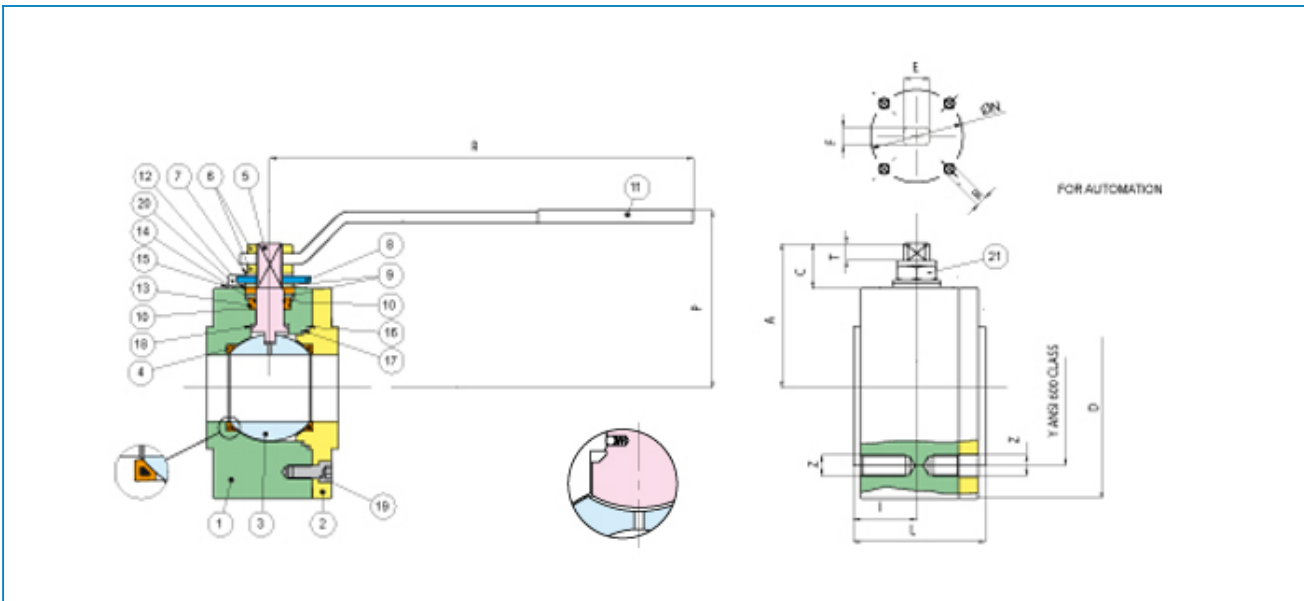

Limiti di temperatura: -20° +160° - Temperature range: -20° +160° Vuoto: 10-3 torr. - Vacuum: 10-3 torr.

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	A182-F316L	1
2	END CONNECTION	A182-F316L	1
3	BALL	A351-CF8/ A182-F316	1
4	BALL SEAT	P.T.F.E. + MET	2
5	STEM	A182 - F316	1
6	NUT	STAINLESS STEEL	2
7	SPRING WASHER	STAINLESS STEEL	4
8	90° STOP	STAINLESS STEEL	1
9	BUSH	A182-F316	2
10	STEM SEAT	P.T.F.E.	1
11	HANDLE	STAINLESS STEEL	1
12	STEM SEAT	GRAPHOIL	1
13	RING	FKM (VITON)	1
14	RING	FKM (VITON)	1
15	WASHER	A182-F304	2
16	BODY SEAT	GRAPHOIL	1
17	BODY SEAT	P.T.F.E.	1
18	THRUST WASHER	P.T.F.E.	1
19	SCREW	STAINLESS STEEL	3-4-7
20	SCREW	STAINLESS STEEL	2
21	NUT	STAINLESS STEEL	1

MISURA SIZE	DN	D	Y	Z	I	L	R	P	A	C	T	E	F	ØN	B	Kv	PN	Kg
1/2"	15	95	66,7	4 x M14	23,5	55	131	71	52,5	17,5	7,5	M10	7	42-F04	M5	16,3	100	2,4
3/4"	20	115	82,6	4 x M16	24	60	174	88	67,5	22,6	10,1	M12	8	42-F04	M5	29,5	100	3,8
1"	25	125	88,9	4 x M16	26,5	65	174	92	72,5	23,5	9,5	M12	8	42-F04	M5	43	100	4,8
1"1/2	40	155	114,3	4 X M20	38	85	251	131	107	32	12,2	M16	10	50-F05	M6	230	100	11,2
2"	50	165	127	8 X M16	48	100	321	134	109	34	13	M20	14	70-F07	M8	265	100	14
3"	80	210	168,3	8 X M20	75	150	381	155	132	43,5	16	M24	18	70-F07	M8	873	100	32
4"	100	275	215,9	8 X M24	92,5	185	381	185	165	43,5	19	M24	18	102-F10	M10	1.320	100	70

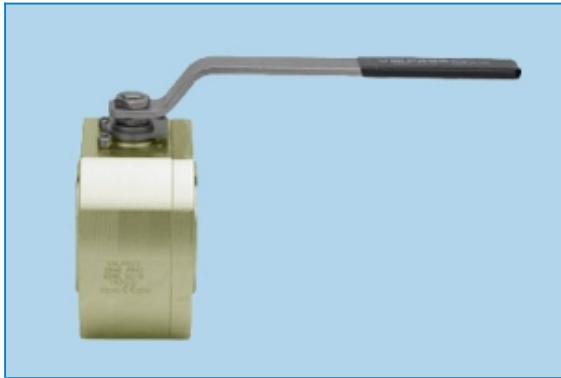
NEW

Serie **WAFER-SPLIT ANSI600**

Articolo **764100**

CARBON STEEL

Wafer Split full bore flanged ball valve, ANSI 600, Antistatic Device, according to UNI EN 558 basic series 101, Fire Safe.

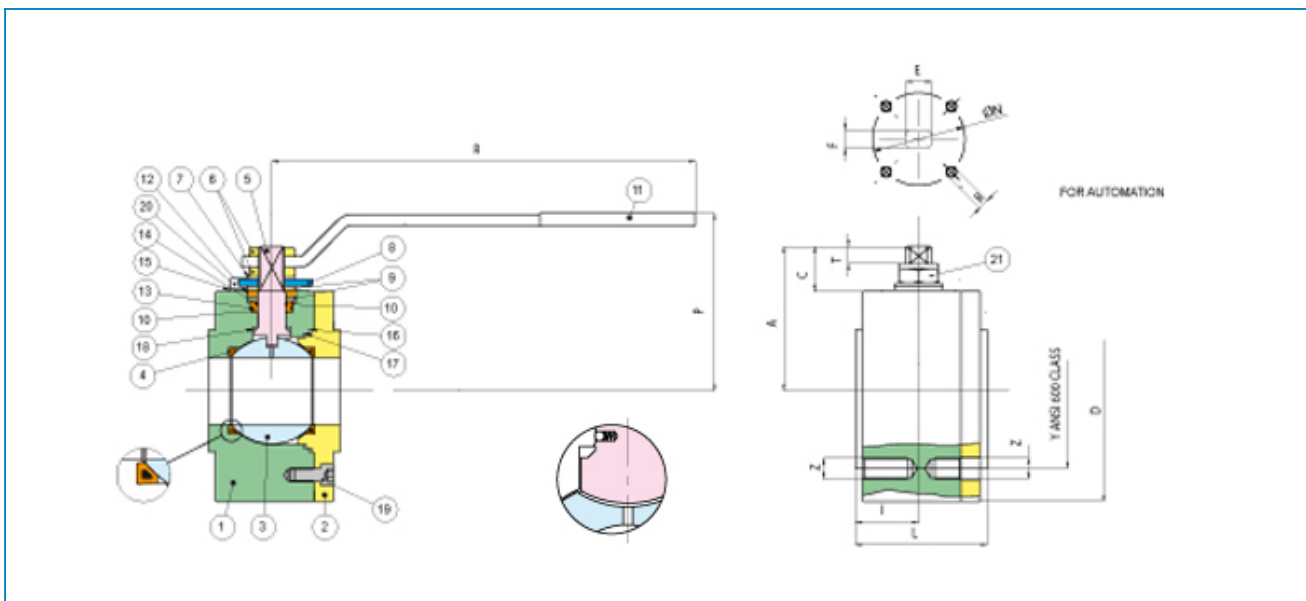

Limiti di temperatura: -20° +160° - Temperature range: -20° +160° Vuoto: 10-3 torr. - Vacuum: 10-3 torr.

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	A350 - LF2	1
2	END CONNECTION	A350 - LF2	1
3	BALL	A351-CF8/A182-F304	1
4	BALL SEAT	P.T.F.E. + MET	2
5	STEM	A182 - F304	1
6	NUT	CARBON STEEL	2
7	SPRING WASHER	CARBON STEEL	4
8	90° STOP	CARBON STEEL	1
9	BUSH	A182-F316	2
10	STEM SEAT	P.T.F.E.	1
11	HANDLE	CARBON STEEL	1
12	STEM SEAT	GRAPHOIL	1
13	RING	FKM (VITON)	1
14	RING	FKM (VITON)	1
15	WASHER	A182-F304	2
16	BODY SEAT	GRAPHOIL	1
17	BODY SEAT	P.T.F.E.	1
18	THRUST WASHER	P.T.F.E.	1
19	SCREW	CARBON STEEL	3-4-7
20	SCREW	STAINLESS STEEL	2
21	NUT	STAINLESS STEEL	1

MISURA SIZE	DN	D	Y	Z	I	L	R	P	A	C	T	E	F	ØN	B	Kv	PN	Kg
1/2"	15	95	66,7	4 x M14	23,5	55	131	71	52,5	17,5	7,5	M10	7	42-F04	M5	16,3	100	2,4
3/4"	20	115	82,6	4 x M16	24	60	174	88	67,5	22,6	10,1	M12	8	42-F04	M5	29,5	100	3,8
1"	25	125	88,9	4 x M16	26,5	65	174	92	72,5	23,5	11	M12	8	42-F04	M5	43	100	4,8
1"1/4	32	135	98,4	4 X M16	31,5	75	251	101	94	31	12	M16	10	50-F05	M6	89	100	7,2
1"1/2	40	155	114,3	4 X M20	38	85	251	131	107	32	12,2	M16	10	50-F05	M6	230	100	11,2
2"	50	165	127	8 X M16	48	100	321	134	109	34	13	M20	14	70-F07	M8	265	100	14
2"1/2	65	190	149,2	8 X M20	62,5	125	321	147	121	33,5	12,5	M20	14	70-F07	M8	540	100	21,5
3"	80	210	168,3	8 X M20	75	150	381	155	132	43,5	16	M24	18	70-F07	M8	873	100	32
4"	100	275	215,9	8 X M24	92,5	185	381	185	165	43,5	19	M24	18	102-F10	M10	1.320	100	70