

SOLENOID VALVE PILOT OPERATED 2/2 WAY NORMALLY CLOSED
Elettrovalvola 2/2 vie, normalmente chiusa, servo comandata



HIGHLIGHTS

- 2/2 way pilot operated N.C
- 0.1 – 20 bar
- Available direct acting version
- Seals/Tenuta: NBR – EPDM – FKM
- High flow rate
- Available NSF approved model
- Serviceable
- Air – Water – Inert Gas – Light Oils
- 3 pole connector IP65 included - UNI ISO 4400 (DIN 43650A)

PRODUCT DESCRIPTION

Solenoid valve 2/2 way, normally closed, pilot operated. Also available with direct acting operation (8332-8333-8334). The body valve is made in brass as well as the core tube. The tube can be also unscrewed in order to make ordinary maintenance. It is suitable for various applications, compatible with different fluids and temperatures. Particularly indicated to drain condensate for compressor. Valve supplied with three pole connector IP65 - UNI ISO 4400 (DIN 43650A).

DESCRIZIONE PRODOTTO

Elettrovalvola 2/2 vie, normalmente chiusa, servo comandata. Disponibili anche versioni a comando diretto (8332-8333-8334). Il corpo è in ottone, così come il cannotto. Il cannotto è smontabile per consentire la manutenzione ordinaria della valvola. Può essere impiegata in numerose applicazioni, compatibile con diversi fluidi e temperature. Particolarmente indicata per lo scarico condensa dei compressori. Elettrovalvola fornita con connettore tripolare IP65 - UNI ISO 4400 (DIN 43650A).





GENERAL FEATURES / CARATTERISTICHE GENERALI

Body material / Materiale corpo	Brass		
Seal material / Materiale di tenuta	EPDM	NBR	FKM
Fluid Temp. °C / Temp. fluido °C	130°	90°	150°
Tube material / Materiale tubo	Brass		
Working fluids / Applicazioni	Air, water, Inert Gas, Light Oils		
Electrical connect. / Connes. elettrica	6,3 x 0,8 fast-on terminal - UNI ISO 4400		
Insulation class / Classe di isolamento	H		
Coil voltage / Voltaggio	220-230VAC 50-60Hz	100-120VAC 60Hz	12-24 VDC
Coil power / Potenza bobina	22 VA	22 VA	21 W
Ambient temp. / Temp. ambiente	80 °C	80 °C	80 °C
Fluid temp. / Temp. fluido	140 °C	145 °C	140 °C
Approvals / Approvazioni	VDE; CE	UL	CE

SPECIFICATIONS / CARATTERISTICHE

	CONNECTION	ORIFICE Ø (mm)	KV m³/h	M.O.P.D. (bar)		DIMENSIONS (mm)			CODE
				AC	DC	A	B	C	
PILOT OPERATED	1/4 NPT	11	1.40	20	20	55	91	60	8302
	3/8 NPT	11	1.50	20	20	55	91	60	8303
	1/2 NPT	11	1.60	20	20	55	91	60	8304
	G 1/4	11	1.40	20	20	55	91	60	8322
	G 3/8	11	1.50	20	20	55	91	60	8323
	G 1/2	11	1.60	20	20	55	91	60	8324
DIRECT ACTING	G 1/4	11	1.50	0.5	0.3	55	91	60	8332
	G 3/8	11	1.60	0.5	0.3	55	91	60	8333
	G 1/2	11	1.70	0.5	0.3	55	91	60	8334

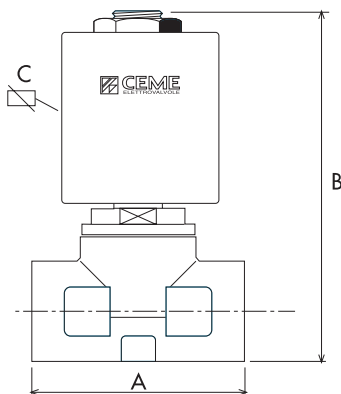

FIXING POINTS

2/2 WAY NC

IN/OUT

830...

