

**HIGHLIGHT**

- 2/2 way direct acting N.C
- 0 – 25 bar
- NSF approved
- Thermoplastic PESU
- Core Tube in stainless steel
- Seal in FKM food grade

PRODUCT DESCRIPTION

Solenoid valve 2/2 way , normally closed direct acting especially dedicated to beverage and coffee applications. These valves are available with different connections and performance in order to meet any kind of needs.

DESCRIZIONE PRODOTTO

Elettrovalvola 2/2 vie, normalmente chiusa ad azionamento diretto, particolarmente indicata per settore beverage e caffè. Queste valvole sono disponibili con diversi tipi di attacco e prestazioni in modo da soddisfare ogni tipo di esigenza.



Water Management



Steam



Coffee



Beverage

GENERAL FEATURES / CARATTERISTICHE GENERALI

Body material / Materiale corpo	Thermoplastic PESU		
Seal material / Materiale di tenuta	FKM food grade		
Tube material / Materiale tubo	Stainless steel		
Working fluids / Applicazioni	Air, water, steam		
Electrical connect. / Connes. elettrica	6,3 x 0,8 fast-on terminal - UNI ISO 6952		
Insulation class / Classe di isolamento	H		
Coil voltage / Voltaggio	220-230VAC 50-60Hz	100-120VAC 60Hz	12-24 VDC
Coil power / Classe di isolamento	13,5 VA	14 VA	9 W
Ambient temp. / Temp. ambiente	120 °C	80 °C	80 °C
Fluid temp. / Temp. fluido	140 °C	145 °C	140 °C
Approvals / Approvazioni	VDE; CE; NSF; WRAS; ACS	UL; NSF; WRAS; ACS	CE; NSF; WRAS; ACS

SPECIFICATIONS / CARATTERISTICHE


CONNECTIONS	ORIFICE Ø	KV	M.O.P.D. (bar)	
in/out	(mm)	m ³ /h	AC	DC
HB - HB	2.0	0.10	13	9
PUSH FIT Ø4mm	2.0	0.10	13	9

HYDRAULIC CONNECTION**2/2 WAY NC**


INLET MODULE	MIDDLE MODULE	CAP MODULE
		

TWIN BLOCK
TECHNOPOLYMER SOLENOID VALVE 2/2 WAY N.C.
Elettrovalvola in Tecnochimero 2/2 vie N.C.


INLET MODULE HB

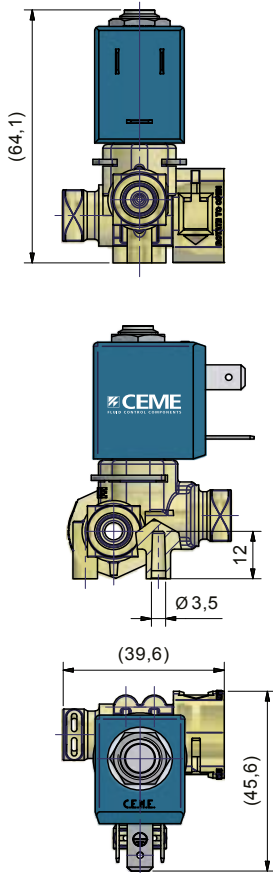


MIDDLE MODULE HB

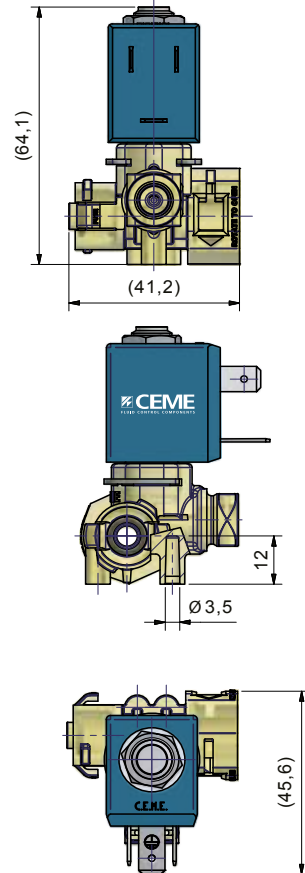


CAP MODULE HB

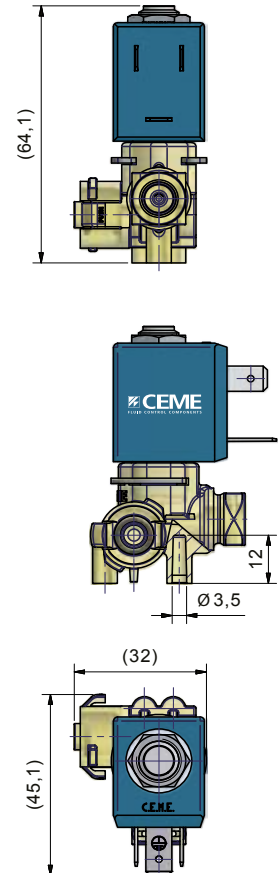

INLET MODULE PUSH FIT

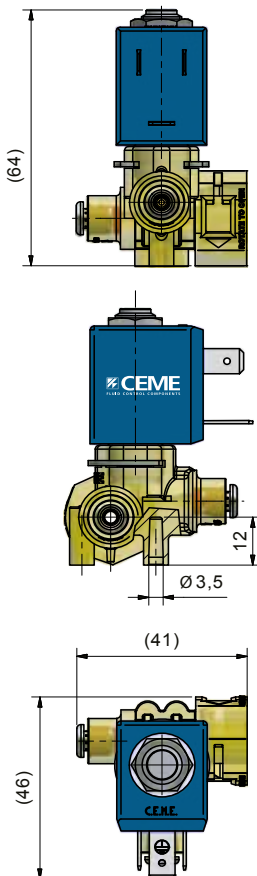

MIDDLE MODULE PUSH FIT

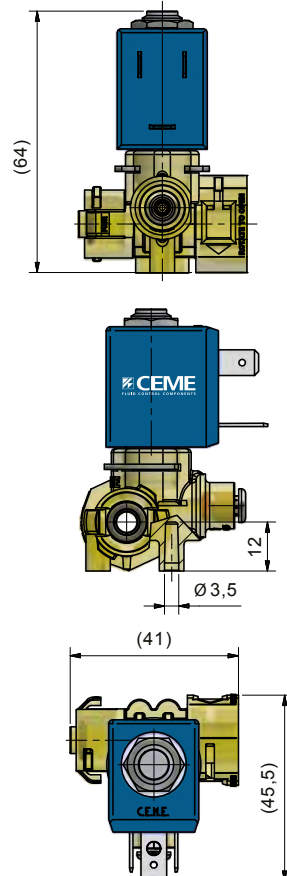

CAP MODULE PUSH FIT

