


Y STRAINER – 2-Way – DN15 (1/2") to DN50 (2")

PVC-U, PP-H, PVDF

Conform to the 2014/68/EU Directive

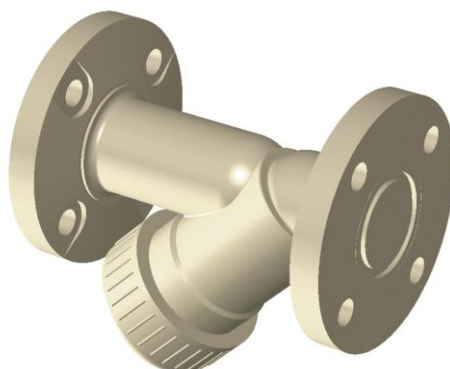

DN50 - PP-H – Flanged



DN50 – PVC-U – Double union



DN50 – PVDF – Double union

MAIN FEATURES

- Injected Strainer.
- ETFE Mesh, size 0.5mm (other mesh size available)
- Many connections available.

Les descriptions et caractéristiques figurant sur ce document sont données uniquement à titre d'information et non d'engagement contractuel. SAFI se réserve le droit d'effectuer sans préavis, toute modification.

SAFI has a policy of continuously developing its product range and the above data is subject to change without prior notification.

Die Beschreibungen und Daten, die sich auf diesem Dokument befinden, sind rein informativ und unverbindlich. SAFI behält sich vor, ohne Vorankündigung Änderungen vorzunehmen, die als technisch notwendig erachtet werden.

Las descripciones y características que figuran en este documento son indicativas. En ningún caso son contractuales. SAFI se reserva el derecho sin previo aviso de efectuar cualquier modificación.

SAFI

Av. Jacques Moison – BP 1
26770 TAULIGNAN
FRANCE
Tél.: (+33) 4 75 53 56 29
Fax : (+33) 4 75 53 62 78
info@safi-valves.com

SAFI Limited

35 Holton Road
Holton Heath Trading Park
POOLE Dorset - BH16 6LT
UNITED KINGDOM
Tél.: (+44) 1202 624618
Fax : (+44) 1202 628500
sales@safi-valves.com

SAFI Deutschland

Kunststoffarmaturen
Vertriebs GmbH
Jahnstrasse 29
64319 PFUNGSTADT
DEUTSCHLAND
Tél. : (+49) 61 57 81 919
Fax : (+49) 61 57 82 025
info-deutschland@safi-valves.com

SAFI Fabrica de Valvulas


C/ Carboners, 35
Pol. Ind. La Cometa
43700 EL VENDRELL
TARRAGONA-ESPAÑA
Tel.: (+34) 977 665 147
Fax : (+34) 977 664 989
info@safi-valvulas.com

SAFI America

Las Garzas Trade Center
Las Garzas #950, B
Quilicura
SANTIAGO – CHILE
Tél.: (+56 2) 2 510 3500
Fax : (+56 2) 2 510 3507
info@safi-america.com

DIMENSIONS

PP-H, PVDF VERSION

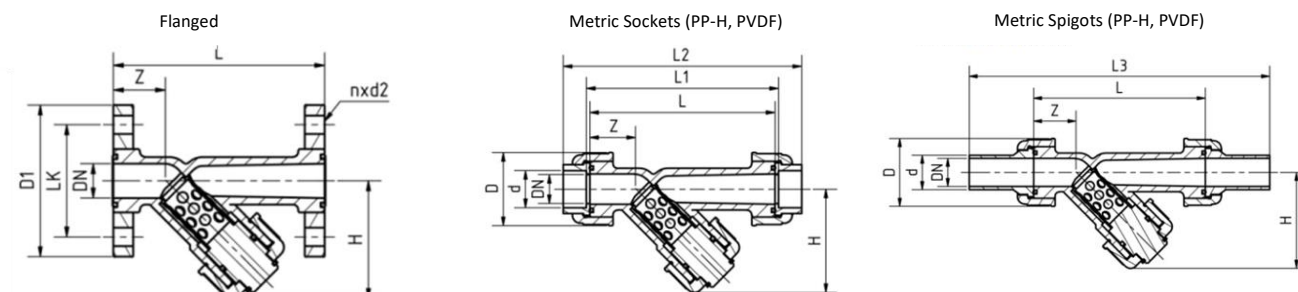

			Dimensions											
d	DN	DN	Z	H	L	L1	L2	L3	D	LK		D1		n x d2
mm	mm	inch	mm	mm	mm	mm	mm	mm	mm	DIN mm	ANSI mm	DIN mm	ANSI mm	mm
20	15	1/2"	36	115	130	140	168	238	42	65	60,3	95	88,9	4xØ14
25	20	3/4"	36	115	150	160	192	264	48	75	69,8	105	98,4	4xØ14
32	25	1"	41	126	160*	170	206	280	68	85	79,4	115	108	4xØ14
40	32	1 1/4"	45	160	180*	190	230	306	85	100	88,9	140	117,5	4xØ18
50	40	1 1/2"	51	174	200*	210	256	332	85	110	98,4	150	127	4xØ18
63	50	2"	60	209	230*	240	294	368	102	125	120,6	165	152,4	4xØ18

DIN = Drilling in accordance with EN 1092-1 PN10/PN16

ANSI = Drilling in accordance with EN1759-1/ASME B16.5 Class 150

*PVDF Version : +0/-5mm Tolerance


d	DN	DN	PP-H			PVDF		
mm	mm	inch	Weight (Kg)			Weight (kg)		
			Flanged	Metric Sockets	Metric Spigots	Flanged	Metric Sockets	Metric Spigots
20	15	1/2"	0,30	0,12	0,13	0,40	0,24	0,25
25	20	3/4"	0,37	0,16	0,17	0,50	0,31	0,33
32	25	1"	0,50	0,22	0,24	0,68	0,42	0,45
40	32	1 1/4"	0,83	0,36	0,40	1,15	0,68	0,74
50	40	1 1/2"	1,10	0,51	0,60	1,51	0,94	1,10
63	50	2"	1,50	0,85	0,95	2,2	1,55	1,65

Standard Mesh: 0.5mm


(Available on Request: 0.25mm / 1.0mm / 2.0mm)

PVC-U, PVC-U Transparent Version


Flanged

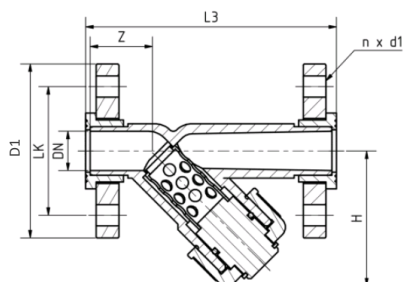

Metric Sockets (PVC-U)

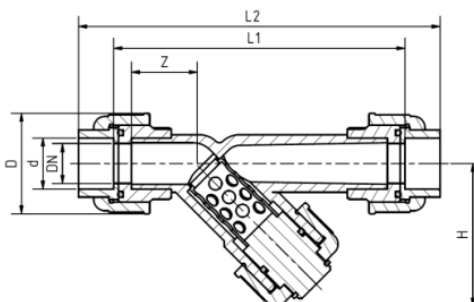

Metric Spigots (PVC-U)

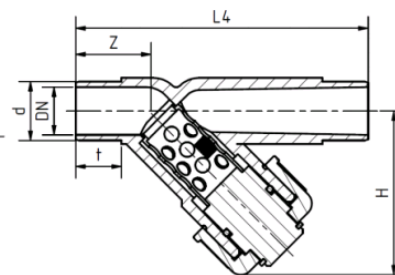

			DIMENSIONS												
d	DN	DN	Z	t	H	L1	L2	L3	L4	D	LK		D1		n x d1
mm	mm	inch	mm	mm	mm	mm	mm	mm	mm	mm	DIN mm	ANSI mm	DIN mm	ANSI mm	mm
20	15	1/2"	36	16	75	150	182	130	124	42	65	60,3	95	88,9	4xØ14
25	20	3/4"	36	19	80	170	208	150	144	48	75	69,8	105	98,4	4xØ14
32	25	1"	41	22	90	183	224	160	154	68	85	79,4	115	108	4xØ14
40	32	1 1/4"	45	26	110	209	256	180	171	85	100	88,9	140	117,5	4xØ18
50	40	1 1/2"	51	31	128	235	290	200	195	85	110	98,4	150	127	4xØ18
63	50	2"	60	38	150	270	342	230	226	102	125	120,6	165	152,4	4xØ18

DIN = Drilling in accordance with EN 1092-1 PN10/PN16


ANSI = Drilling in accordance with EN1759-1/ASME B16.5 Class 150

d	DN	DN	PVC		
mm	mm	inch	Weight (kg)		
			Flanged	Metric Spigots	Metric Sockets
20	15	1/2"	0,34	0,19	0,25
25	20	3/4"	0,42	0,21	0,30
32	25	1"	0,58	0,29	0,40
40	32	1 1/4"	0,96	0,48	0,68
50	40	1 1/2"	1,30	0,70	0,98
63	50	2"	1,90	1,26	1,60

Standard Mesh: 0.5mm

(Available on Request: 0.25mm / 1.0mm / 2.0mm)

PARTS LIST

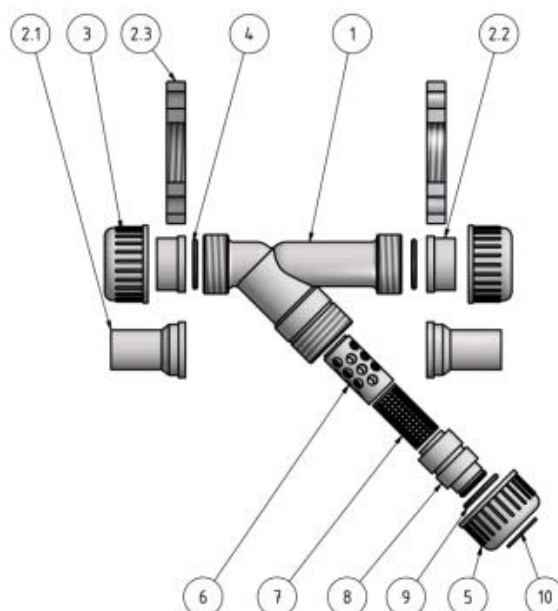

N°	Description	Material
1	Body	PP-H, PVDF, PVC-U
2.1	Metric Spigot	PP-H, PVDF
2.2	Metric Socket	PVC-U, PP-H, PVDF
2.3	Flange	PVC/GFK
3	Connection nut	PP-H, PVDF, PVC-U
4	Seal	EPDM, FPM
5	Sleeve Nut	PP-H, PVDF, PVC-U
6	Cage	PP-H, PVDF, PVC-U
7	Sieve Mesh 0,5mm	ETFE (FEP)
8	Holder	PP-H, PVDF, PVC-U
9	Seal	EPDM, FPM
10	Spring-lock washer	PVC


Assembly Instructions :

- Fit Seal (9) into the groove of the holder (8)
- Introduce the Sieve mesh (7) into the cage (6)
- Place the cage (6) in the holder (8)
- Insert assembled piece (6-9) into the body (1)
- Screw the sleeve nut (5) to the body and secure with the Spring lock Washer (10)
- Set up the connection nut (3) on the piping system
- Weld the sockets/ends to the piping (2.1, 2.2)
- Place Seals (4) in the body (1)
- Place the assembly on the piping (Caution: the installation must be done in the position of the above diagram.).
- Set the Strainer on the piping with the connection nuts (3)


Drilling of Cage:

- DN15 : Ø6 mm holes
- DN20 : Ø7 mm holes
- DN25 : Ø8 mm holes
- DN32 : Ø10 mm holes
- DN40 : Ø12 mm holes
- DN50 : Ø14 mm holes


PRESSURE / TEMPERATURE CURVES

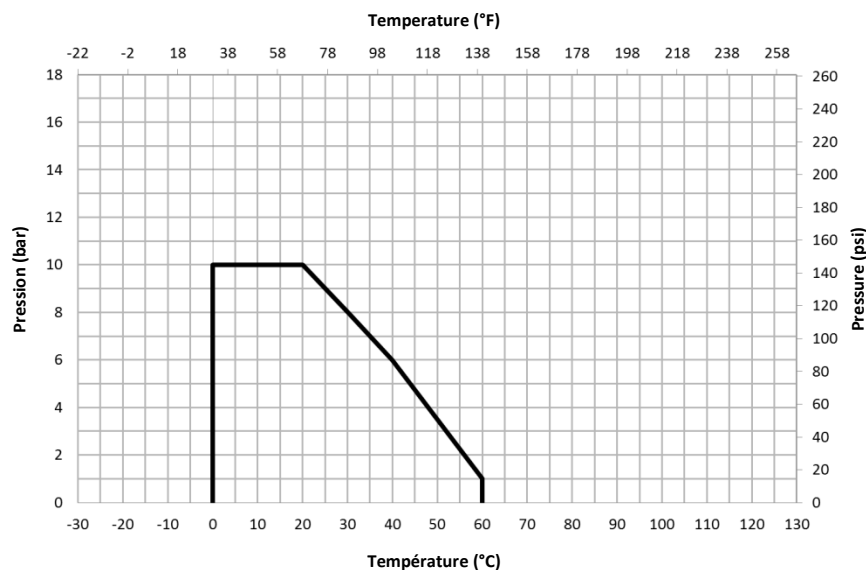

PVC-U

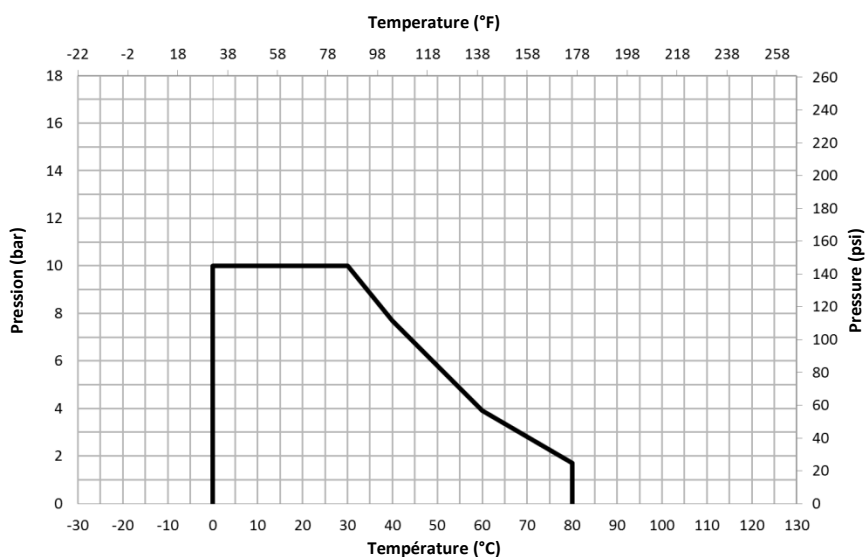

PP-H

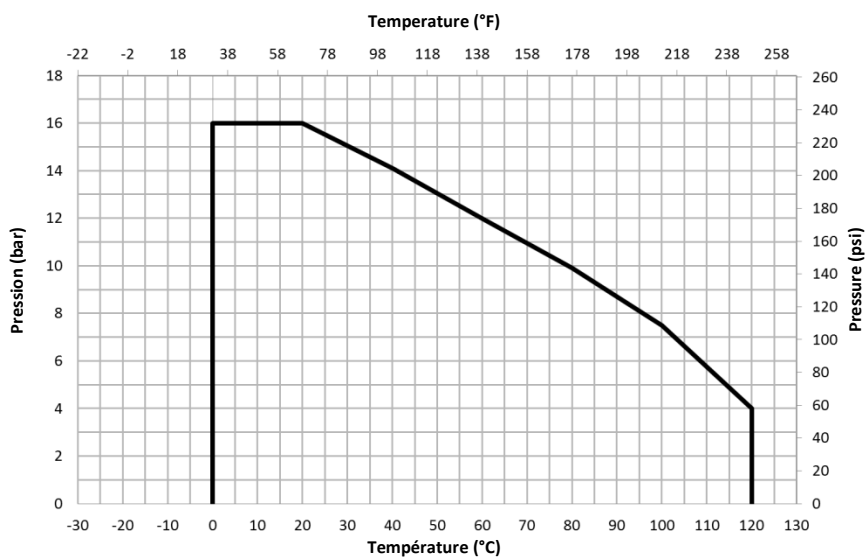

PVDF

Pressure /Temperature Summary

DN	Working Pressure (in bars 20°C)		
	PP-H	PVDF	PVC-U
15 to 50	10	16	10

Working Temperature		
PP-H	PVDF	PVC-U
0°C to + 80°C	0°C to +120°C	0°C to + 60°C

Pressure Loss

DN	Kv (m ³ /h)
15	2,1
20	3,9
25	5,4
32	9,3
40	13,5
50	22,2

Kv defined according to NF EN 1267
(0,5mm Mesh)

Pressure Loss given for a clean Strainer (absence of clogging, even partial or in-significant)

Our valves are guaranteed for an average fluid velocity in the pipeline of ≤ 2 m/s. Please contact us with the working conditions for any higher speed.

CHEMICAL RESISTANCE

The chemical resistance of the valve is subject to the type of fluid, the temperature, the pressure, as well as the materials and seals of the valve.

Please contact us to have a personalized analysis of the resistance of one of our products to a given fluid

You can also consult, for information only, the table given in ISO 10358. However, this table cannot be considered as a recommendation by SAFI who could not be held liable for the use of this document.

DETERMINING A PRODUCT CODE

TYPE	SPECIFICATION	DN	Fitting (Inlet)	Fitting (Outlet)	Seals	ETFE Mesh
4640 = Transparent PVC-U Y Strainer 4650 = PVC-U Y Strainer 4660 = PP-H Y Strainer 4670 = PVDF Y Strainer	- = Standard Z = Special	00 = DN15 01 = DN20 02 = DN25 03 = DN32 04 = DN40 05 = DN50	B = PVC DIN Metric Socket C = Fusion welding Metric Plain Socket F = Flanges with drilling in accordance with EN 1092-1 PN10/PN16 (DIN) I = Fusion welding Metric Spigot Z = Cement welding Metric Spigot	B = PVC DIN Metric Socket C = Fusion welding Metric Plain Socket F = Flanges with drilling in accordance with EN 1092-1 PN10/PN16 (DIN) I = Fusion welding Metric Spigot Z = Cement welding Metric Spigot	E = EPDM V = FPM	In Standard : 05T = 0.5mm mesh Upon Request : 025T = 0.25mm mesh 10T = 1.0mm mesh 20T = 2.0mm mesh

Example : 4660-04FFE05T

4660	-	04	F	F	E	05T
PP-H Y Strainer	Standard	DN40	Flange with drilling in accordance with EN 1092-1 PN10/PN16 (DIN)	Flange with drilling in accordance with EN 1092-1 PN10/PN16 (DIN)	EPDM Seals	Standard ETFE Mesh size 0.5mm